
Prolights

MiniEclWDTU_26

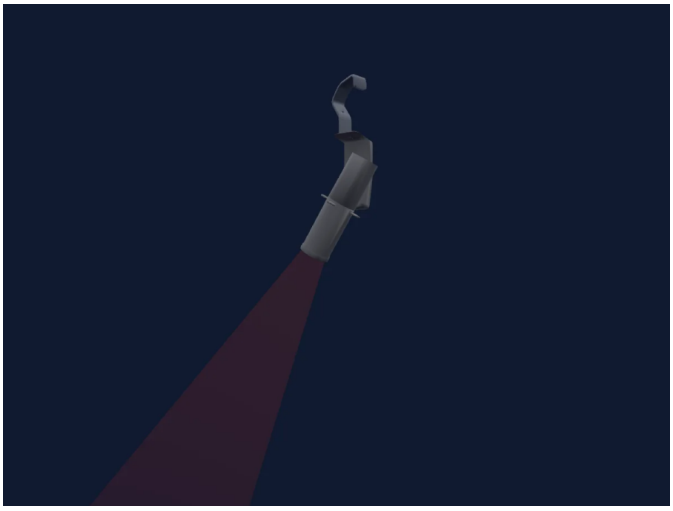

Manufacturer	**Prolights**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**23.5°**
Pan range	**360°**
Tilt range	**270°**
Size (W × H × D)	**103 × 226 × 103 mm**
GDTF fixture type	**21B0603B-4C2C-4B1D-8665-C4…**

Controls

Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

1ch	1 ch
2ch	2 ch
5ch	5 ch

1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	10	10–10 Open 11–254 Slow Strobe 255–255 Fast Strobe

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	10	10–10 Open 11–254 Slow Strobe 255–255 Fast Strobe
3	Effect	10	0–10 NoFeature 11–70 Effect 1 71–130 Effect 2 131–190 Effecr 3 191–255 Effect 4
4	Effect Speed	0	0–254 Slow rate 255–255 Fast rate
5	Dimmer Mode	0	0–51 AsFrom Menu 52–101 Off 102–152 Fast 153–203 Mid 204–255 Slow