
RentalikaLX

ACME STAGE BLINDER IP WW2 (BL-200 WW2)

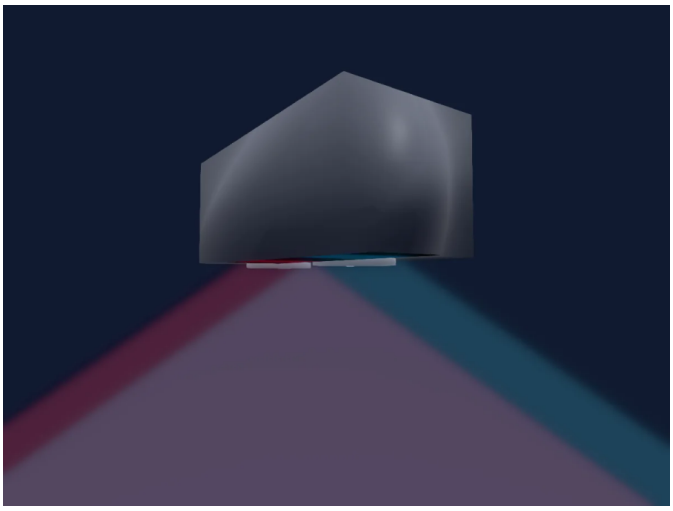

Manufacturer	**RentalikaLX**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**1, 2, 4, 6 channels**
Beam angle	**110°**
Size (W × H × D)	**396 × 164 × 183 mm**
GDTF fixture type	**FF76B80F-0535-46C2-A13D-AD…**

Controls

Strobe · Dimmer

DMX modes

Mode 1 1 DMX	1 ch
Mode 2 2 DMX	2 ch
Mode 3 4 DMX	4 ch
Mode 4 6 DMX	6 ch

Mode 1 1 DMX

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open

Mode 2 2 DMX

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer	0	0–254 Close 255–255 Open

Mode 3 4 DMX

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer	0	0–254 Close 255–255 Open
3	Dimmer	0	0–254 Close 255–255 Open
4	Shutter / Strobe	0	0–5 Open 6–122 min Strobe 123–123 max Strobe 124–127 Open2 128–185 Shutter Random · Shutter Ran 10–13 Hz 186–190 Open3 191–249 Shutter Ran strobe · Shutter Ran2 15–20 Hz 250–255 Open4

Mode 4 6 DMX

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Close 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Dimmer	0	
4	Dimmer Fine	0	Fine byte of Dimmer
5	Dimmer	0	0–254 Close 255–255 Open
6	Shutter / Strobe	0	0–5 Open 6–122 min Strobe 123–123 max Strobe 124–127 Open2 128–185 Shutter Random · Shutter Ran 10–13 Hz 186–190 Open3 191–249 Shutter Random2 · Shutter Ran2 15–20 Hz 250–255 Open4