
Silver Star

FD3

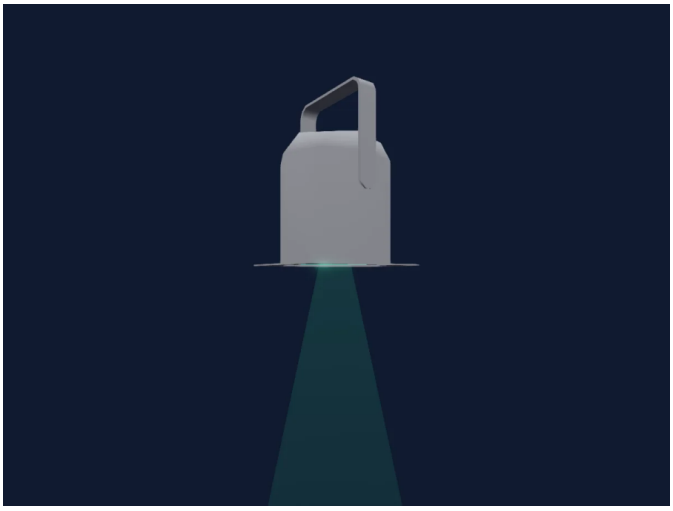

Manufacturer	**Silver Star**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 3 channels**
Beam angle	**25°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**B6299C35-E8AB-4F22-9CE5-D5…**

Controls

Strobe · Dimmer

DMX modes

UNO	1 ch
DOS	2 ch
STD P	3 ch

UNO

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

DOS

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STD P

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open 10–99 Strobe 100–109 Open 110–179 Shutter1StrobePulse 4 · Lightning 1–25 Hz 180–189 Open 190–255 Random