
Silver Star

FD4

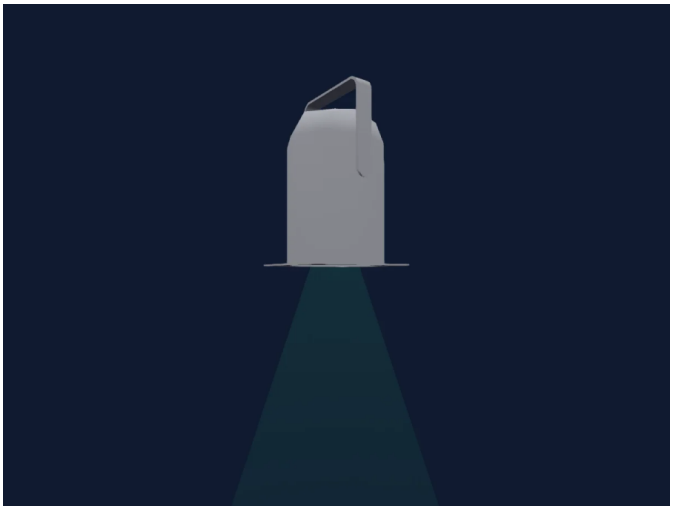

Manufacturer	**Silver Star**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 5 channels**
Beam angle	**15-60°**
Size (W × H × D)	**250 × 250 × 45 mm**
GDTF fixture type	**A5932AFA-5B95-4AEE-912A-2F…**

Controls

Zoom · Strobe · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

UNO	1 ch
DOS	2 ch
STD P	5 ch

UNO

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

DOS

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STD P

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open 10–53 Strobe · Slow 1–12.6 Hz 54–98 Strobe · Med 12.9–24.7 Hz 99–99 Strobe · Fast 25 Hz 100–109 Open 110–143 Lightning Strobe · Slow 1–12.5 Hz 144–178 Lightning Strobe · Med 12.8–24.7 Hz 179–179 Lightning Strobe · Fast 25 Hz 180–189 Open 190–221 Random Strobe · Slow 1–12.4 Hz 222–254 Random Strobe · Med 12.8–24.6 Hz 255–255 Random Strobe · Fast 25 Hz
4	Zoom	128	0–127 Narrow 128–254 Med 255–255 Wide
5	Control1	0	0–200 No Function 201–220 Motor Reset 221–255 No Function