
Silver Star

Moonlite 150 WW

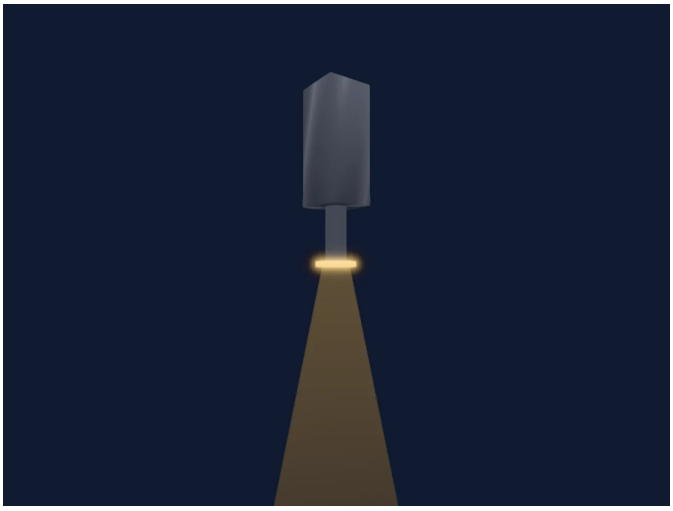

Manufacturer	**Silver Star**
Type	**PAR**
DMX modes	**3**
DMX footprint	**1, 2, 4 channels**
Beam angle	**25°**
Size (W × H × D)	**175 × 432 × 170 mm**
GDTF fixture type	**3C6B7A57-5F9A-41F9-9BDD-1B…**

Controls

Strobe · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

Uno	1 ch
Dos	2 ch
STD P	4 ch

Uno

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Dos

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer

STD P

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–9 Open 10–99 Strobe 100–109 Open 110–179 Shutter1StrobePulse 4 · Lightning 1–15 Hz 180–189 Open 190–255 Random
4	Control1	0	0–10 No Function 11–100 Reserved 101–110 Dimmer Off 111–120 Dimmer Dim4 121–150 Reserved 151–160 1200Hz 161–170 2400Hz 171–180 4000Hz 181–190 6000Hz 191–200 25000Hz 201–210 All Reset 211–255 Reserved