
Silver Star

# P5

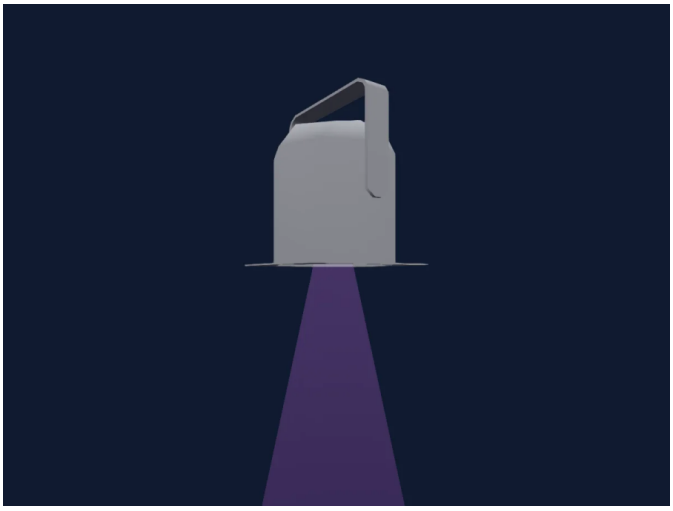

| | |
|---|---|
| Manufacturer | **Silver Star** |
| Type | **PAR** |
| DMX modes | **7** |
| DMX footprint | **1, 3, 4, 5, 9 channels** |
| Beam angle | **25°** |
| Size (W × H × D) | **250 × 195 × 45 mm** |
| GDTF fixture type | **D337A8B2-74EA-4933-85A8-CC…** |

## Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

## Safety-relevant functions

Strobe

## DMX modes

| | |
|---|---|
| SOLID | 1 ch |
| ARC1 | 3 ch |
| ARC1+D | 4 ch |
| ARC2 | 4 ch |
| ARC2+D | 5 ch |
| ARC FULL | 9 ch |
| SPECIAL2 | 9 ch |

## SOLID

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |

## ARC1

3 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |

## ARC1+D

4 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Red | 255 | |
| 3 | Green | 255 | |
| 4 | Blue | 255 | |

## ARC2

4 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | Color Add GY | 0 | |

## ARC2+D

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Red | 255 | |
| 3 | Green | 255 | |
| 4 | Blue | 255 | |
| 5 | Color Add GY | 0 | |

## ARC FULL

9 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | |
| 2 | Red | 255 | |
| 3 | Green | 255 | |
| 4 | Blue | 255 | |

### ARC FULL (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| **5** | Color Wheel | 0 | 0–15 NO FUNCTION (wheel slot 25)<br>16–20 R40 (wheel slot 1)<br>21–25 L24 (wheel slot 2)<br>26–40 L164 (wheel slot 3)<br>41–45 L08 (wheel slot 4)<br>46–55 L25 (wheel slot 5)<br>56–60 L237 (wheel slot 6)<br>61–65 R321 (wheel slot 7)<br>66–75 L652 (wheel slot 8)<br>76–80 L765 (wheel slot 9)<br>81–105 L513 (wheel slot 10)<br>106–115 L90 (wheel slot 11)<br>116–135 R92 (wheel slot 12)<br>136–140 L728 (wheel slot 13)<br>141–145 L117 (wheel slot 14)<br>146–155 L354 (wheel slot 15)<br>156–160 L501 (wheel slot 16)<br>161–180 L174 (wheel slot 17)<br>181–195 L142 (wheel slot 18)<br>196–200 L794 (wheel slot 19)<br>201–215 L328 (wheel slot 20)<br>216–220 L127 (wheel slot 21)<br>221–235 L192 (wheel slot 22)<br>236–240 L157 (wheel slot 23)<br>241–245 R332 (wheel slot 24)<br>246–255 NO FUNCTION (wheel slot 25) |
| **6** | C TC | 0 | 0–9 NO FUNCTION<br>10–24 1800K<br>25–39 2200K<br>40–54 2700K<br>55–69 3000K<br>70–84 3200K<br>85–99 4000K<br>100–114 4500K<br>115–129 5000K<br>130–144 5600K<br>145–159 6000K<br>160–174 6500K<br>175–189 7000K<br>190–204 8000K<br>205–255 10000K |
| **7** | Shutter / Strobe | 0 | 0–9 NO FUNCTION<br>10–99 STROBE FROM SLOD TO FAST<br>100–109 NO FUNCTION<br>110–179 THUNDER STROBE<br>180–189 NO FUNCTION<br>190–255 RANDOM STROBE |
| **8** | Reserved 8 | 0 | |
| **9** | Control1 | 0 | 0–10 NO FUNCTION<br>11–100 RESERVED<br>101–110 DIMMER OFF<br>111–120 DIMMER DIM4<br>121–255 RESERVED |

## SPECIAL2

9 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| **1** | Dimmer | 0 | |
| **2** | Red | 255 | |

## SPECIAL2 (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| **3** | Green | 255 | |
| **4** | Blue | 255 | |
| **5** | Color Add GY | 0 | |
| **6** | Color Wheel | 0 | 0–15 NO FUNCTION (wheel slot 25)<br>16–20 R40 (wheel slot 1)<br>21–25 L24 (wheel slot 2)<br>26–40 L164 (wheel slot 3)<br>41–45 L08 (wheel slot 4)<br>46–55 L25 (wheel slot 5)<br>56–60 L237 (wheel slot 6)<br>61–65 R321 (wheel slot 7)<br>66–75 L652 (wheel slot 8)<br>76–80 L765 (wheel slot 9)<br>81–105 L513 (wheel slot 10)<br>106–115 L90 (wheel slot 11)<br>116–135 R92 (wheel slot 12)<br>136–140 L728 (wheel slot 13)<br>141–145 L117 (wheel slot 14)<br>146–155 L354 (wheel slot 15)<br>156–160 L501 (wheel slot 16)<br>161–180 L174 (wheel slot 17)<br>181–195 L142 (wheel slot 18)<br>196–200 L794 (wheel slot 19)<br>201–215 L328 (wheel slot 20)<br>216–220 L127 (wheel slot 21)<br>221–235 L192 (wheel slot 22)<br>236–240 L157 (wheel slot 23)<br>241–245 R332 (wheel slot 24)<br>246–255 NO FUNCTION (wheel slot 25) |
| **7** | C TC | 0 | 0–9 NO FUNCTION<br>10–24 1800K<br>25–39 2200K<br>40–54 2700K<br>55–69 3000K<br>70–84 3200K<br>85–99 4000K<br>100–114 4500K<br>115–129 5000K<br>130–144 5600K<br>145–159 6000K<br>160–174 6500K<br>175–189 7000K<br>190–204 8000K<br>205–255 10000K |
| **8** | Shutter / Strobe | 0 | 0–9 NO FUNCTION<br>10–99 STROBE FROM SLOD TO FAST<br>100–109 NO FUNCTION<br>110–179 THUNDER STROBE<br>180–189 NO FUNCTION<br>190–255 RANDOM STROBE |
| **9** | Control1 | 0 | 0–10 NO FUNCTION<br>11–100 RESERVED<br>101–110 DIMMER OFF<br>111–120 DIMMER DIM4<br>121–255 RESERVED |