
Silver Star

TF2-AuroLITE 80-SS5421TCT

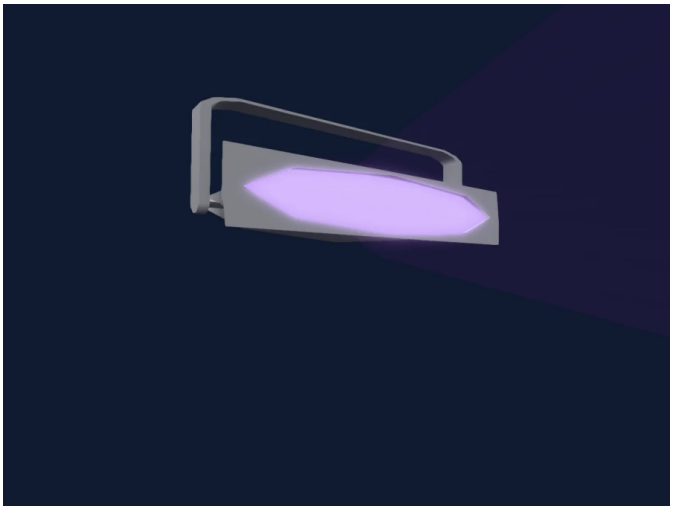

Manufacturer	**Silver Star**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 3, 6, 9 channels**
Beam angle	**25°**
Size (W × H × D)	**642 × 195 × 45 mm**
GDTF fixture type	**1D705E75-49B7-4E9D-9D86-2E…**

Controls

Extra LED colours · Colour temperature · Strobe · Dimmer

Safety-relevant functions

Fixture reset · Strobe

DMX modes

UNO	1 ch
VW-D	3 ch
VW-F	6 ch
STD-P	9 ch

UNO

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

VW-D

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	White Count	0	
3	Cool White	0	

VW-F

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	White Count	0	
4	White Count Fine	0	Fine byte of White Count
5	Cool White	0	
6	Cool White Fine	0	Fine byte of Cool White

STD-P

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	White Count	0	
4	White Count Fine	0	Fine byte of White Count
5	Cool White	0	
6	Cool White Fine	0	Fine byte of Cool White
7	C TC	0	0–10 NO FUNCTION 11–41 2800K-3000K 42–71 3000K-3200K 72–101 3200K-3500K 102–131 3500K-4000K 132–161 4000K-4200K 162–191 4200K-4500K 192–221 4500K-5000K 222–251 5000K-5600K 252–255 5600K-6000K
8	Shutter / Strobe	0	0–9 NO FUNCTION 10–99 STROBE FROM 100–109 NO FUNCTION 110–179 LIGHTING STROBE 180–189 NO FUNCTION 190–255 RANDOM STROBE

STD-P (continued)

Ch	Function	Default	DMX values
9	Control1	0	0–10 NO FUNCTION 11–80 RESERVE 81–90 1200HZ 91–100 2000HZ 101–110 4000HZ 111–120 6000HZ 121–130 25000HZ 131–140 DIM OFF 141–150 DIM1 151–160 DIM2 161–170 DIM3 171–180 DIM4 181–190 RESERVE 191–200 ALL RESET 201–255 RESERVE