
Jolly

LP-1218-4

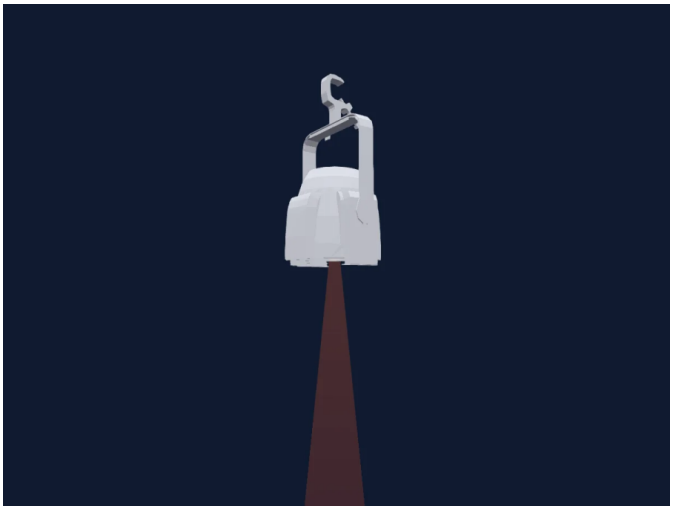

Manufacturer	**Jolly**
Type	**PAR**
DMX modes	**2**
DMX footprint	**8, 14 channels**
Beam angle	**12°**
Size (W × H × D)	**25 × 124 × 114 mm**
GDTF fixture type	**FF2AD982-CAD3-4312-87A9-B7…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

mode1	8 ch
mode2	14 ch

mode1

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	C TO	0	
6	Shutter / Strobe	0	0–3 Closed 4–103 Slow Random 104–107 Open 108–207 Pulse Slow---Fast 208–212 Open 1 213–225 Random Slow Strobe 226–238 Random Med Storbe 239–251 Random Fast Storbe 252–255 Open 2
7	Dimmer	0	
8	Color Macro1	0	

mode2

14 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Red Fine	0	Fine byte of Red
3	Green	0	
4	Green Fine	0	Fine byte of Green
5	Blue	0	
6	Blue Fine	0	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White
9	C TO	0	
10	Shutter / Strobe	0	0–3 Closed 4–103 Strobe Slow---Fast 104–107 Open 108–207 Pulse Random Slow 208–212 Open 1 213–232 Randow Slow Strobe 233–251 Randow Fast Strobe 252–255 Open 2
11	Dimmer	0	
12	Dimmer Mode	0	
13	Color Macro1	0	
14	Dimmer Curve	0	