
Kadence

Tambora

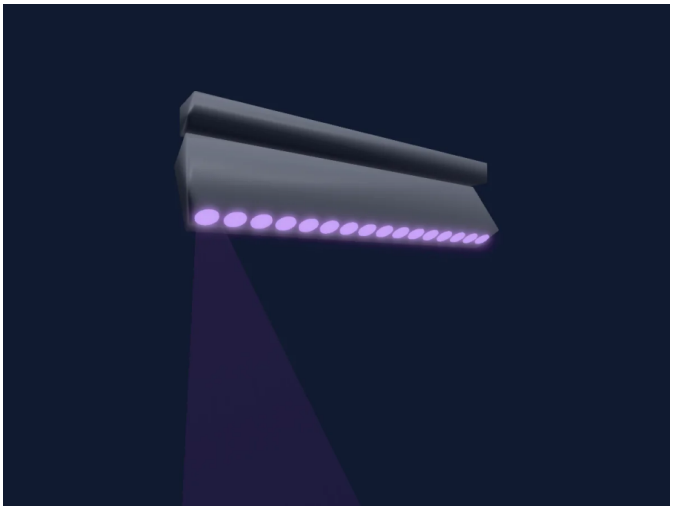

Manufacturer	**Kadence**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**13 channels**
Beam angle	**4-40°**
Tilt range	**215°**
Size (W × H × D)	**1000 × 190 × 107 mm**
GDTF fixture type	**630CCE9A-D533-43AD-8E81-D8…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Strobe · Dimmer

Safety-relevant functions

Fixture reset

DMX modes

13 Channels Mode — 13 ch

13 Channels Mode

13 channels

Ch	Function	Default	DMX values
1	Tilt	128	0–127 107 128–254 Home 255–255 -107
2	Tilt Fine	0	Fine byte of Tilt
3	Zoom	0	0–127 Narrow 128–254 Mid 255–255 Wide
4	Tilt Rotate	0	
5	Dimmer	0	0–254 0 255–255 100
6	Shutter / Strobe	104	0–3 Close 4–4 Shutter1Strobe 2 · 1Hz 1 Hz 5–102 Shutter1Strobe 2 · 1Hz - 25Hz 1.24–24.8 Hz 103–103 Shutter1Strobe 2 · 25Hz 25 Hz 104–107 Open 108–108 Pulse 1/2Hz 109–206 Shutter1StrobePulse 4 · 1/2Hz - 25Hz 0.747–24.8 Hz 207–207 Pulse 25Hz 208–212 Open 213–225 Random Slow 226–238 Random Mid 239–251 Random Fast 252–255 Open
7	Red	255	0–127 0 128–254 50 255–255 100
8	Green	255	0–127 0 128–254 50 255–255 100
9	Blue	255	0–127 0 128–254 50 255–255 100
10	White	0	0–127 0 128–254 50 255–255 100
11	Position Effect	0	
12	Intensity MSpeed	0	0–63 Static 64–159 Forward running speed from fast to slow 160–255 Run in the opposite direction from slow to fast
13	Fixture Global Reset	0	