
Lupo

DAYLED 2000 PRO 5600K

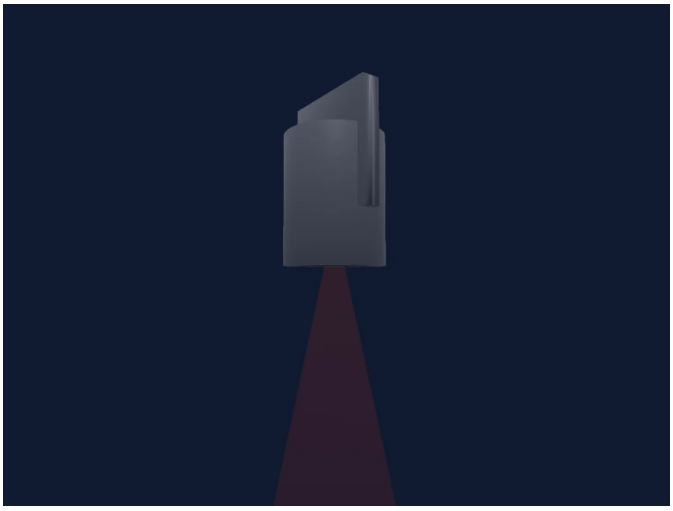

Manufacturer	**Lupo**
Type	**Spot**
DMX modes	**6**
DMX footprint	**1, 2, 3, 6 channels**
Beam angle	**25°**
Size (W × H × D)	**238 × 248 × 40 mm**
GDTF fixture type	**E0F32D62-3EC8-4E69-B5C4-C6…**

Controls

Dimmer

DMX modes

Mode 1 - Intensity 8Bit	1 ch
Mode 2 - Intensity16Bit	2 ch
Mode 3 - Paparazzi 8bit	3 ch
Mode 5 - Lightning 8bit	3 ch
Mode 4 - Paparazzi 16 bit	6 ch
Mode 6 - Lightning 16bit	6 ch

Mode 1 - Intensity 8Bit

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 closed 255–255 open

Mode 2 - Intensity16Bit

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 closed 255–255 open
2	Dimmer Fine	0	Fine byte of Dimmer

Mode 3 - Paparazzi 8bit

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	L EDFrequency	0	
3	Lamp Control	0	

Mode 5 - Lightning 8bit

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	No Feature	0	
3	L EDFrequency	0	

Mode 4 - Paparazzi 16 bit

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	L EDFrequency	0	
4	L EDFrequency Fine	0	Fine byte of L EDFrequency
5	Lamp Control	0	
6	Lamp Control Fine	0	Fine byte of Lamp Control

Mode 6 - Lightning 16bit

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	No Feature	0	
4	No Feature Fine	0	Fine byte of No Feature
5	L EDFrequency	0	
6	L EDFrequency Fine	0	Fine byte of L EDFrequency