
Luxibel

B Blinded1

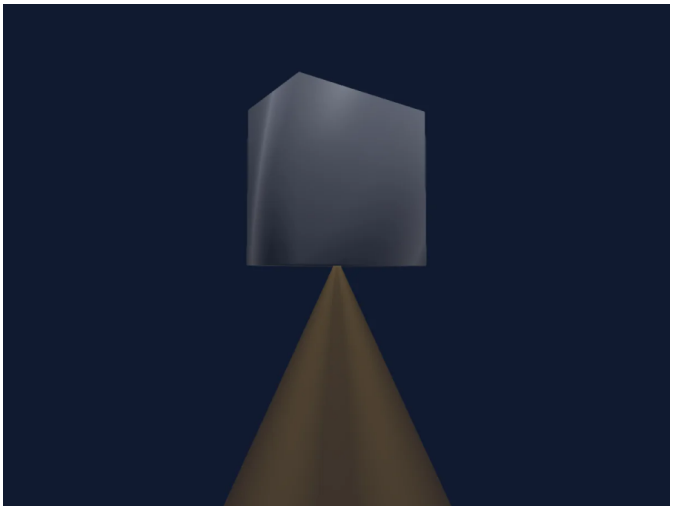

Manufacturer	**Luxibel**
Type	**Blinder**
DMX modes	**3**
DMX footprint	**1, 2, 4 channels**
Beam angle	**50°**
Size (W × H × D)	**150 × 234 × 222 mm**
GDTF fixture type	**3DB3CBC1-9468-4F14-9102-B8…**

Controls

Strobe · Dimmer

DMX modes

1 channel mode	1 ch
2 channel mode	2 ch
4 channel mode	4 ch

1 channel mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2 channel mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Shutter / Strobe	0	0–5 Open 1 6–122 Strobe · Slow 0–19.8 Hz 123–123 Strobe · Fast 20 Hz 124–127 Open 2 128–168 Shutter1StrobeRandom 4 · Speed 1 0–6.61 Hz 169–208 Shutter1StrobeRandom 4 · Speed 2 6.78–13.2 Hz 209–249 Shutter1StrobeRandom 4 · Speed 3 13.4–20 Hz 250–255 Open 3

4 channel mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	0	0–5 Open 1 6–122 Strobe · Slow 0–19.8 Hz 123–123 Strobe · Fast 20 Hz 124–127 Open 2 128–168 Shutter1StrobeRandom 4 · Speed 1 0–6.61 Hz 169–208 Shutter1StrobeRandom 4 · Speed 2 6.78–13.2 Hz 209–249 Shutter1StrobeRandom 4 · Speed 3 13.4–20 Hz 250–255 Open 3
4	Dimmer Mode	0	0–63 According to the menu 64–127 Fast 128–191 Smooth 192–255 Und