
MARK

FLM 200

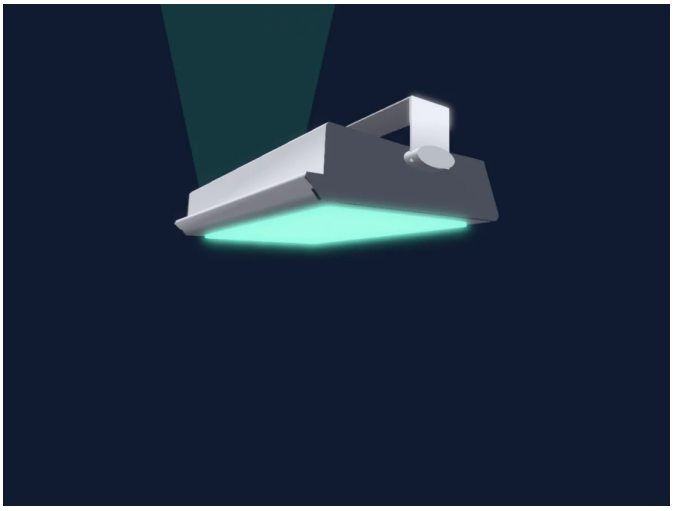

Manufacturer	**MARK**
Type	**Effect light**
DMX modes	**3**
DMX footprint	**1, 4, 9 channels**
Beam angle	**25°**
Size (W × H × D)	**380 × 100 × 240 mm**
GDTF fixture type	**2980E02E-65D8-4734-928E-DA…**

Controls

Effect speed · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1 CHANNEL	1 ch
4 CHANNELS	4 ch
9 CHANNELS	9 ch

1 CHANNEL

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer

4 CHANNELS

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
2	Shutter1Strobe	255	0–0 Open 1–1 Min Strobe 2–254 Strobe S > F 255–255 Max Strobe
3	Effect	0	0–0 No Function 1–9 Macro 1 10–19 Macro 2 20–29 Macro 3 30–39 Macro 4 40–49 Macro 5 50–59 Macro 6 60–69 Macro 7 70–79 Macro 8 80–89 Macro 9 90–99 Macro 10 100–109 Macro 11 110–119 Macro 12 120–129 Macro 13 130–139 Macro 14 140–149 Macro 15 150–159 Macro 16 160–169 Macro 17 170–179 Macro 18 180–189 Macro 19 190–199 Macro 20 200–209 Macro 21 210–219 Macro 22 220–229 Macro 23 230–239 Macro 24 240–249 Audio Macro 1 250–255 Audio Macro 2
4	Effect Speed	0	0–0 Min Speed 1–254 Macro Speed S > F 255–255 Max Speed

9 CHANNELS

9 channels

Ch	Function	Default	DMX values
1	Shutter1Strobe	255	0–0 Open 1–1 Min Strobe 2–254 Strobe S > F 255–255 Max Strobe
2	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
3	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer

9 CHANNELS (continued)

Ch	Function	Default	DMX values
4	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
5	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
6	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
7	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
8	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer
9	Dimmer	0	0–0 Min Dimmer 1–254 Dimmer 255–255 Max Dimmer