
MegaLite

Drama EW200

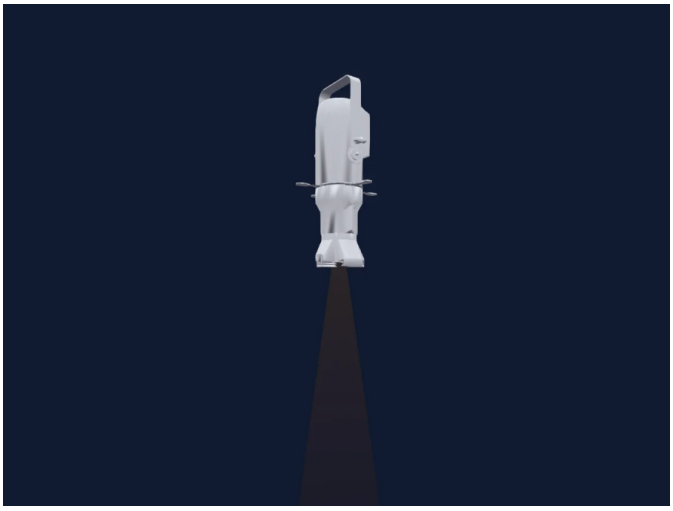

Manufacturer	**MegaLite**
Type	**Spot**
DMX modes	**3**
DMX footprint	**1, 2, 3 channels**
Beam angle	**17.1°**
Size (W × H × D)	**272 × 316 × 49 mm**
GDTF fixture type	**39485260-616F-11EF-ABC8-525…**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1 Channel Mode	1 ch
2 Channel Mode	2 ch
3 Channel Mode	3 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max

2 Channel Mode

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Shutter / Strobe	0	0–0 Open - Shutter Open 1–127 Strobe S > F - Strobe 128–159 Pulse On S > F - Strobe Pulse Open 160–191 Pulse Off S > F - Strobe Pulse Closed 192–255 Strobe Random S > F - Strobe Random

3 Channel Mode

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Shutter / Strobe	0	0–0 Open - Shutter Open 1–127 Strobe S > F - Strobe 128–159 Pulse On S > F - Strobe Pulse Open 160–191 Pulse Off S > F - Strobe Pulse Closed 192–255 Strobe Random S > F - Strobe Random
3	Dimmer Curve	0	0–49 Linear Dimming - Custom 50–99 Square Law Dimming - Custom 100–149 Inverse Square Law Dimming - Custom 150–255 S-Type Dimming - Custom