
MegaLite

ZipStrip WW40

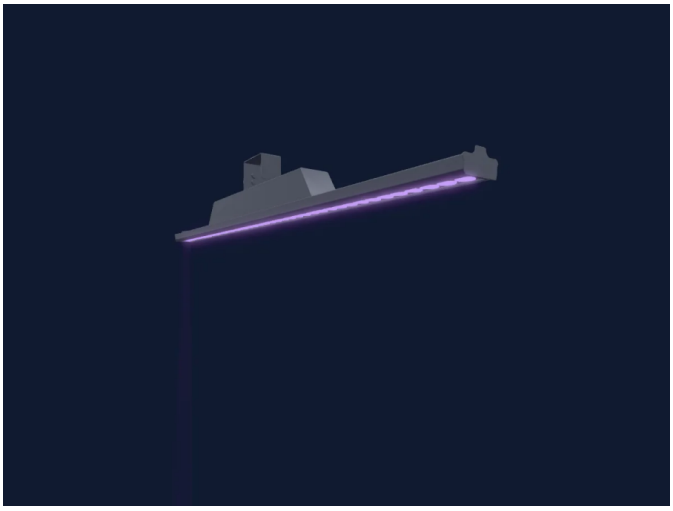

Manufacturer	**MegaLite**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**1, 4, 40, 44 channels**
Beam angle	**2.7°**
Size (W × H × D)	**83 × 49 × 41 mm**
GDTF fixture type	**15609B60-641E-11EF-A47A-525…**

Controls

Extra LED colours · Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

1 Channel Mode	1 ch
4 Channel Mode	4 ch
40 Channel Mode	40 ch
44 Channel Mode	44 ch

1 Channel Mode

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max

4 Channel Mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random
3	Effect	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
4	Effect Speed	0	0–0 Min 1–254 Min > Max 255–255 Max

40 Channel Mode

40 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
2	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
3	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
4	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
5	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max

40 Channel Mode (continued)

Ch	Function	Default	DMX values
6	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
15	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max

40 Channel Mode (continued)

Ch	Function	Default	DMX values
24	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
33	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max

44 Channel Mode

44 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
2	Shutter / Strobe	0	0–9 Open - Shutter Open 10–99 Strobe S > F - Strobe 100–149 Pulse Strobe S > F - Strobe Pulse Random 150–199 Strobe Random All S > F - Strobe Random 200–255 Strobe Random Each S > F - Strobe Random
3	Effect	0	0–9 No Function - Custom 10–49 Macro 1 - Macro 50–99 Macro 2 - Macro 100–109 Macro 3 - Macro 110–119 Macro 4 - Macro 120–129 Macro 5 - Macro 130–139 Macro 6 - Macro 140–149 Macro 7 - Macro 150–159 Macro 8 - Macro 160–169 Macro 9 - Macro 170–179 Macro 10 - Macro 180–189 Macro 11 - Macro 190–199 Macro 12 - Macro 200–209 Macro 13 - Macro 210–219 Macro 14 - Macro 220–227 Macro 15 - Macro 228–255 Macro 16 - Macro
4	Effect Speed	0	0–0 Min 1–254 Min > Max 255–255 Max
5	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
6	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
7	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
8	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
9	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
10	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
11	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
12	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
13	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
14	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max

44 Channel Mode (continued)

Ch	Function	Default	DMX values
15	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
16	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
17	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
18	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
19	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
20	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
21	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
22	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
23	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
24	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
25	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
26	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
27	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
28	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
29	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
30	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
31	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
32	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max

44 Channel Mode (continued)

Ch	Function	Default	DMX values
33	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
34	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
35	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
36	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
37	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
38	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
39	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
40	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
41	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
42	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
43	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max
44	Color Add WW	255	0–0 Min 1–254 Min > Max 255–255 Max