
Nanlite

Forza 500 II

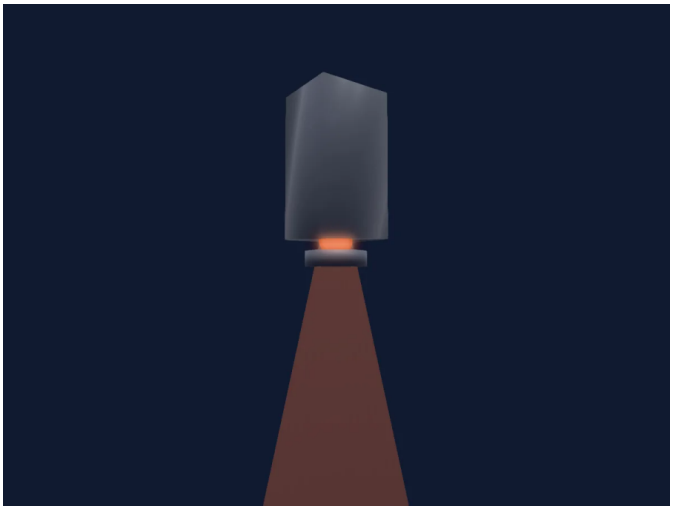

Manufacturer	**Nanlite**
Type	**PAR**
DMX modes	**2**
DMX footprint	**6, 10 channels**
Size (W × H × D)	**100 × 190 × 90 mm**
GDTF fixture type	**08254F22-4422-4234-BDA6-2B...**

Controls

Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

DAYLIGHT 8BIT	6 ch
DAYLIGHT 16BIT	10 ch

DAYLIGHT 8BIT

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Tint	133	0–10 Neutral 11–20 -80 Green 21–99 -79 to -1 Green 100–165 Neutral 166–244 +1 to +79 Green 245–255 +80 Green
3	Fan Mode	0	0–63 Smart 64–127 Full Speed 128–191 Low Speed 192–255 Fan Off
4	Shutter / Strobe	0	0–3 Off 4–4 Random Fast 5–5 Random Medium 6–6 Random Slow 7–255 Variable Strobe (1 to 25Hz)
5	No Feature	0	
6	No Feature	0	

DAYLIGHT 16BIT

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Tint	133	0–18 Neutral 19–38 -80 Green 39–116 -79 to -1 Green 117–155 Neutral 156–233 +1 to +79 Green 234–255 +80 Green
4	Tint Fine	133	Fine byte of Tint
5	Fan Mode	0	0–63 Smart 64–127 Full Speed 128–191 Low Speed 192–255 Fan Off
6	Shutter / Strobe	0	0–3 Off 4–4 Random Fast 5–5 Random Medium 6–6 Random Slow 7–255 Variable Strobe (1 to 25Hz)
7	No Feature	0	
8	No Feature Fine	0	Fine byte of No Feature
9	No Feature	0	
10	No Feature Fine	0	Fine byte of No Feature