
Prolights

GalleryWashDATVW

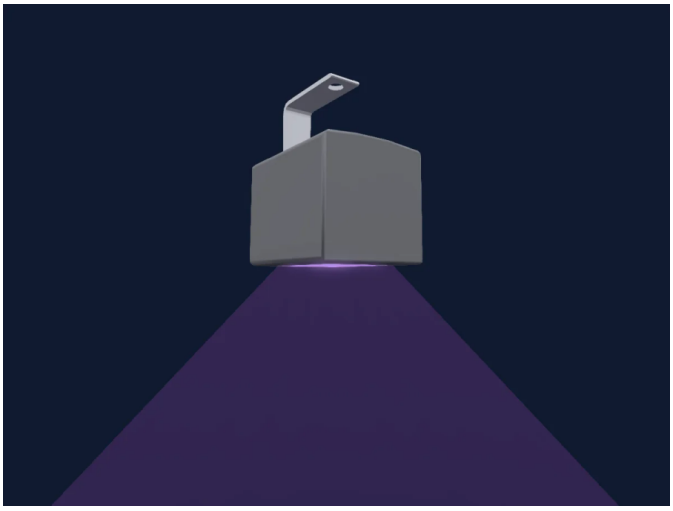

Manufacturer	**Prolights**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 3, 5, 10 channels**
Beam angle	**86.2°**
Size (W × H × D)	**85 × 109 × 30 mm**
GDTF fixture type	**6367DAC5-DFB3-4085-A899-81…**

Controls

Extra LED colours · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

Uno_1ch	1 ch
Basic_3ch	3 ch
Standard_5ch	5 ch
Extended_10ch	10 ch

Uno_1ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

Basic_3ch

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TC	130	0–254 2700K 255–255 5600K
3	Control1	0	0–1 NoFunction 2–3 Linear 4–5 S-Curve 6–7 Square Law 8–9 Inverse Square Law 10–11 Auto 12–13 Fast 14–15 Medium 16–17 Slow 18–19 600 Hz 20–21 1200 Hz 22–23 2000 Hz 24–25 4000 Hz 26–27 6000 Hz 28–29 25 kHz 30–31 Hold 32–33 BlackOut 34–35 StandAlone 36–37 Master DMX 38–39 Master NO DMX 40–41 SLAVE 42–43 CCT 44–45 Manual Colors 46–251 Reserved 252–253 FactoryDefault of control channel 254–255 Reserved2

Standard_5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	255	0–1 Closed 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Open 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	C TC	130	0–254 2700K 255–255 5600K

Standard_5ch (continued)

Ch	Function	Default	DMX values
5	Control1	0	0–1 NoFunction 2–3 Linear 4–5 S-Curve 6–7 Square Law 8–9 Inverse Square Law 10–11 Auto 12–13 Fast 14–15 Medium 16–17 Slow 18–19 600 Hz 20–21 1200 Hz 22–23 2000 Hz 24–25 4000 Hz 26–27 6000 Hz 28–29 25 kHz 30–31 Hold 32–33 BlackOut 34–35 StandAlone 36–37 Master DMX 38–39 Master NO DMX 40–41 SLAVE 42–43 CCT 44–45 Manual Colors 46–251 Reserved 252–253 FactoryDefault of control channel 254–255 Reserved2

Extended_10ch

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Shutter / Strobe	255	0–1 Closed 2–62 Strobe 63–64 Open 65–125 PulseInStrobe 126–127 Open 128–188 PulseOutStrobe 189–190 Open 191–251 RandomStrobe 252–255 Open
4	C TC	130	0–254 2700K 255–255 5600K
5	Color Xfade	0	0–254 CTC 255–255 ColorMix
6	Color Add WW	255	
7	Color Add WW Fine	255	Fine byte of Color Add WW
8	Color Add CW	255	
9	Color Add CW Fine	255	Fine byte of Color Add CW

Extended_10ch (continued)

Ch	Function	Default	DMX values
10	Control1	0	0–1 NoFunction 2–3 Linear 4–5 S-Curve 6–7 Square Law 8–9 Inverse Square Law 10–11 Auto 12–13 Fast 14–15 Medium 16–17 Slow 18–19 600 Hz 20–21 1200 Hz 22–23 2000 Hz 24–25 4000 Hz 26–27 6000 Hz 28–29 25 kHz 30–31 Hold 32–33 BlackOut 34–35 StandAlone 36–37 Master DMX 38–39 Master NO DMX 40–41 SLAVE 42–43 CCT 44–45 Manual Colors 46–251 Reserved 252–253 FactoryDefault of control channel 254–255 Reserved2