
SGM Light

Q-7 W

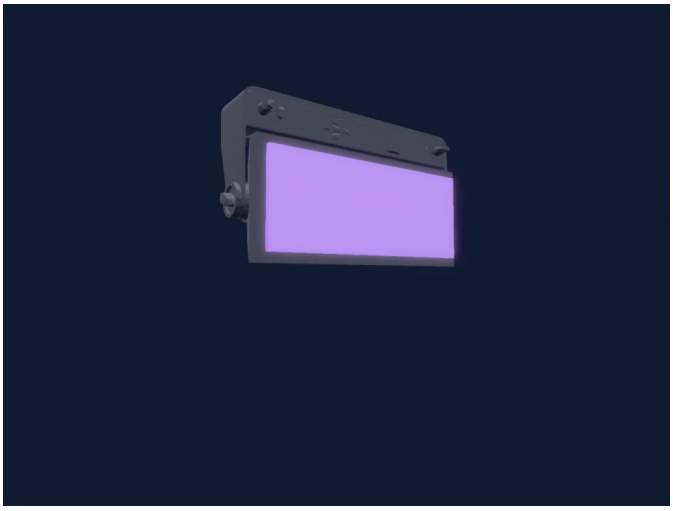

Manufacturer	**SGM Light**
Type	**Blinder**
DMX modes	**5**
DMX footprint	**1, 4, 6, 8 channels**
Beam angle	**110°**
Size (W × H × D)	**496 × 200 × 119 mm**
GDTF fixture type	**D886DF32-7D43-49C3-8728-E2…**

Controls

Strobe · Dimmer

DMX modes

1 Channel	1 ch
4 Channel	4 ch
4 Channel (Strobe Emulation Mode)	4 ch
6 Channel	6 ch
8 Channel (X-5 Emulation Mode)	8 ch

1 Channel

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	

4 Channel

4 channels

Ch	Function	Default	DMX values
1	Dimmer	255	
2	Dimmer	255	
3	Dimmer	255	
4	Dimmer	255	

4 Channel (Strobe Emulation Mode)

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Duration	0	
3	Strobe Rate	0	
4	Shutter1Strobe Effect	0	0–7 No Effect 8–15 Ramp Up 16–151 Ramp Down 152–175 Ramp Up/Down 176–199 Random Strobe 200–244 Lightning 245–255 Spikes

6 Channel

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	8	0–7 Closed 8–15 Open 16–150 Fastest Strobe 151–151 Slowest Strobe 152–174 Slowest Pulse Open 175–175 Fastest Pulse Open 176–198 Slowest Pulse Close 199–199 Fastest Pulse Close 200–243 Slowest Random 244–244 Fastest Random 245–255 Open
2	Dimmer	0	
3	Dimmer	255	
4	Dimmer	255	
5	Dimmer	255	
6	Dimmer	255	

8 Channel (X-5 Emulation Mode)

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Duration	0	
3	Strobe Rate	0	

8 Channel (X-5 Emulation Mode) (continued)

Ch	Function	Default	DMX values
4	Shutter1Strobe Effect	0	0–7 No Effect 8–15 Ramp Up 16–151 Ramp Down 152–175 Ramp Up/Down 176–199 Random Strobe 200–244 Lightning 245–255 Spikes
5	Dimmer	255	
6	Dimmer	255	
7	Dimmer	255	
8	Dimmer	255	