
SHEHDS

LED Beam Bar 8x12W RGBW

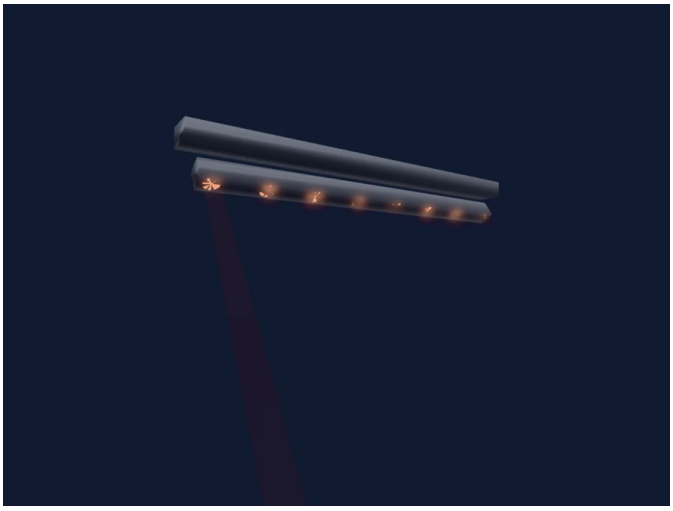

Manufacturer	**SHEHDS**
Type	**Moving head**
DMX modes	**1**
DMX footprint	**38 channels**
Beam angle	**3°**
Tilt range	**190°**
Heads / cells	**8**
Size (W × H × D)	**1000 × 50 × 50 mm**
GDTF fixture type	**39BEFC25-8ACA-46B6-B66B-B1…**

Controls

Effect speed · Strobe · Dimmer · Pixel control · Movement speed

Safety-relevant functions

Fixture reset

DMX modes

Mode 1 — 38 ch

Mode 1

38 channels

Ch	Function	Default	DMX values
1	Tilt	128	
2	Position MSpeed	0	0–64 Max 65–127 Fast 128–192 Mid 193–255 Slow
3	Macros	0	0–10 No FX 11–20 FX 1 21–31 FX 2 32–42 FX 3 43–53 FX 4 54–64 FX 5 65–75 FX 6 76–86 FX 7 87–97 FX 8 98–108 FX 9 109–119 FX 10 120–130 FX 11 131–141 FX 12 142–152 FX 13 153–163 FX 14 164–174 FX 15 175–185 FX 16 186–196 FX 17 197–207 FX 18 208–218 FX 19 219–229 FX 20 230–240 FX 21 241–250 FX 22 251–255 Sound Control
4	Effect Speed	0	0–64 Slow 65–127 Mid 128–191 Fast 192–255 Max
5	Dimmer	0	0–254 Closed 255–255 Open
6	Shutter / Strobe	5	0–10 Open 11–63 Shutter1Strobe · Min 1–2.97 Hz 64–127 Shutter1Strobe · Low 3–5.39 Hz 128–191 Shutter1Strobe · Mid 5.42–7.81 Hz 192–249 Shutter1Strobe · High 7.84–10 Hz 250–255 Open
7	Red	0	
8	Green	0	
9	Blue	0	
10	White	0	
11	Red	0	
12	Green	0	
13	Blue	0	
14	White	0	
15	Red	0	
16	Green	0	
17	Blue	0	
18	White	0	
19	Red	0	
20	Green	0	

Mode 1 (continued)

Ch	Function	Default	DMX values
21	Blue	0	
22	White	0	
23	Red	0	
24	Green	0	
25	Blue	0	
26	White	0	
27	Red	0	
28	Green	0	
29	Blue	0	
30	White	0	
31	Red	0	
32	Green	0	
33	Blue	0	
34	White	0	
35	Red	0	
36	Green	0	
37	Blue	0	
38	White	0	