
StairVille

LED PAR64 CX-3 RGBW

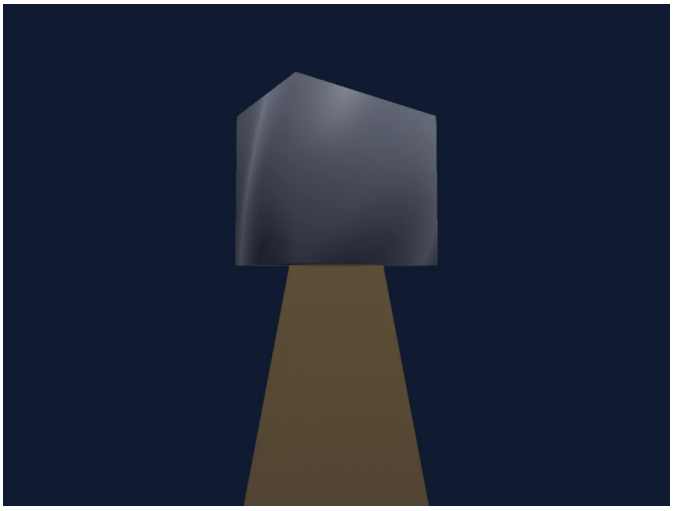

Manufacturer	**StairVille**
Type	**PAR**
DMX modes	**3**
DMX footprint	**4, 6, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**275 × 350 × 380 mm**
GDTF fixture type	**3D72430A-A66D-49BD-B9B4-B…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

4-Ch Mode	4 ch
6-Ch Mode	6 ch
8-Ch Mode	8 ch

4-Ch Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add CW	0	

6-Ch Mode

6 channels

Ch	Function	Default	DMX values
1	Color Macro1	0	0–63 Off 64–127 7 Colour Change 128–191 12 Colour Change 192–255 4 Colour Change
2	Red	0	
3	Green	0	
4	Blue	0	
5	Color Add CW	0	
6	Control1	0	0–10 Macro Off 11–11 Speed lowest 12–254 Speed low to high 255–255 Speed highest

8-Ch Mode

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add CW	0	
5	Color Macro1	0	0–15 Off 16–255 Fixed Colours
6	Strobe Rate	0	0–0 Off 1–15 Speed low to high 16–254 Min 255–255 Max
7	Color Macro2	0	0–31 Off 32–63 Fade Out Effect 64–95 Fade In Effect 96–127 Fade In Out Effect 128–159 Auto Mix Effect 160–191 Chase (4 colours) 192–223 Chase (12 colours) 224–224 Music Control senstitivity lowest 225–254 Music Control sensitivity low to high 255–255 Music Control senstitivity highest
8	Dimmer	255	0–254 Closed 255–255 Open