
Terbly

T90H-WW IP 26Deg

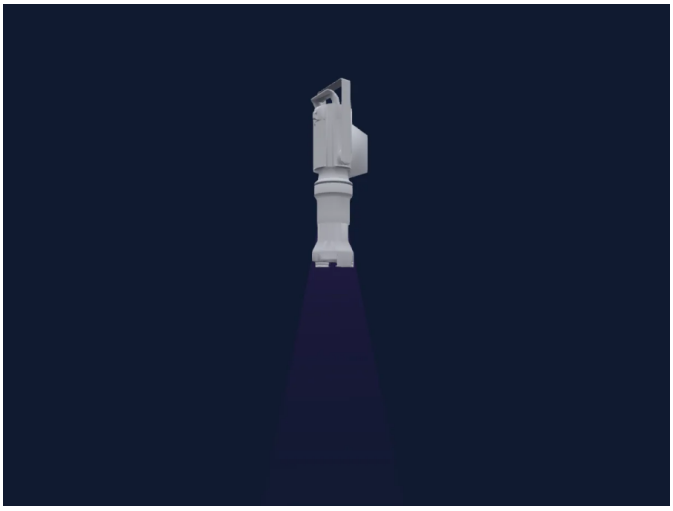

Manufacturer	**Terbly**
Type	**Profile spot**
DMX modes	**3**
DMX footprint	**3, 6, 8 channels**
Beam angle	**26°**
Size (W × H × D)	**187 × 593 × 235 mm**
GDTF fixture type	**D108BDA3-D915-4F7B-9B12-E5…**

Controls

Extra LED colours · Strobe · Dimmer · Gobo rotation

DMX modes

3Channel	3 ch
6Channel	6 ch
8Channel	8 ch

3Channel

3 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Gobo Rotation	0	0–126 zero 127–127 max Index 128–128 >>> 129–188 >> 189–189 > 190–193 Stop 194–194 < 195–254 << 255–255 <<<
3	Custom	0	

6Channel

6 channels

Ch	Function	Default	DMX values
1	Shutter / Strobe	63	0–31 Closed 32–63 Open 64–94 min Strobe 95–95 max Strobe 96–127 Open 2 128–158 min Pulse 159–159 max Pulse 160–191 Open 3 192–222 Random · min Rnd 1–24.2 Hz 223–223 Random · maxRnd 25 Hz 224–255 Open 4
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default to Unit Curve Setting
4	Gobo Rotation	0	0–126 zero 127–127 max Index 128–128 >>> 129–188 >> 189–189 > 190–193 Stop 194–194 < 195–254 << 255–255 <<<
5	Custom	0	
6	Color Add CW	255	

8Channel

8 channels

Ch	Function	Default	DMX values

8Channel (continued)

Ch	Function	Default	DMX values
1	Shutter / Strobe	63	0–31 Closed 32–63 Open 64–94 min Strobe 95–95 max Strobe 96–127 Open 2 128–158 min Pulse 159–159 max Pulse 160–191 Open 3 192–222 Random · min Rnd 1–24.2 Hz 223–223 Random · maxRnd 25 Hz 224–255 Open 4
2	Dimmer	0	0–254 Closed 255–255 Open
3	Dimmer Fine	0	Fine byte of Dimmer
4	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default to Unit Curve Setting
5	Gobo Rotation	0	0–126 zero 127–127 max Index 128–128 >>> 129–188 >> 189–189 > 190–193 Stop 194–194 < 195–254 << 255–255 <<<
6	Custom	0	
7	Color Add CW	255	
8	Color Add CW Fine	255	Fine byte of Color Add CW