
LumiPro

Mini Fresnel 100BI

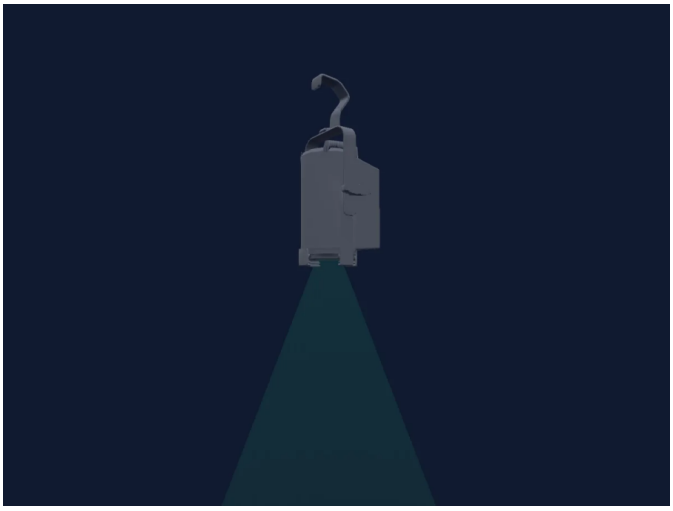

Manufacturer	**LumiPro**
Type	**Spot**
DMX modes	**5**
DMX footprint	**2, 4, 5, 8, 11 channels**
Beam angle	**42.5°**
Size (W × H × D)	**30 × 122 × 84 mm**
GDTF fixture type	**E5C2F6AA-80AA-4B61-B79B-43…**

Controls

Extra LED colours · Colour temperature · Dimmer

DMX modes

Mode 1 - 2ch	2 ch
Mode 2 - 4ch	4 ch
Mode 3 - 5ch	5 ch
Mode 4 - 8ch	8 ch
Mode	11 ch

Mode 1 - 2ch

2 channels

Ch	Function	Default	DMX values
1	Color Add CW	0	
2	Color Add WW	0	

Mode 2 - 4ch

4 channels

Ch	Function	Default	DMX values
1	Color Add CW	0	
2	Color Add CW Fine	0	Fine byte of Color Add CW
3	Color Add WW	0	
4	Color Add WW Fine	0	Fine byte of Color Add WW

Mode 3 - 5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Color Add CW	128	
3	Color Add WW	128	
4	C TC	0	0–10 Non 11–255 CCT Macros
5	Custom	0	

Mode 4 - 8ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Color Add CW	128	
3	Color Add WW	128	
4	C TC	0	0–10 None 11–255 CCT Macros
5	Custom	0	
6	Fan Mode	0	0–49 No Function 50–99 Auto 100–149 Quite 150–199 Studio 200–255 Live
7	Dimmer Curve	0	0–5 No Function 6–63 Linear 64–127 Exponential 128–191 Logaritmic 192–255 S-Curve
8	Control1	0	0–105 No Function 106–115 LED Response 116–145 D-RES (1-10) 146–255 PWM Frequency 2500mHz - 25kHz

Mode

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	Color Add CW	127	
4	Color Add CW Fine	255	Fine byte of Color Add CW
5	Color Add WW	127	
6	Color Add WW Fine	255	Fine byte of Color Add WW
7	C TC	0	0–10 None 11–255 CCT Macros
8	Custom	0	
9	Fan Mode	0	0–49 No Function 50–99 Auto 100–149 Quite 150–199 Studio 200–255 Live
10	Dimmer Curve	0	0–5 No Function 6–63 Linear 64–127 Exponential 128–191 Logaritmic 192–255 S-Curve
11	Control1	0	0–105 No Function 106–115 LED Response 116–145 D-RES (1-10) 146–255 PWM Frequency 2500mHz - 25kHz