
Prolights

# StudioCobTU_60

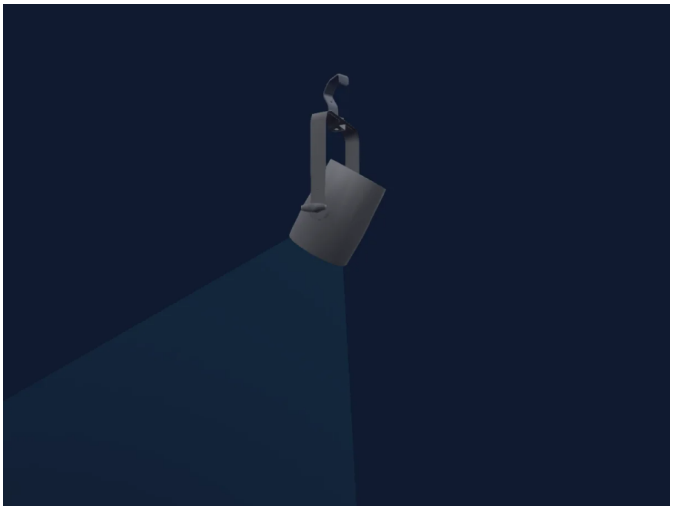

| | |
|---|---|
| Manufacturer | **Prolights** |
| Type | **Moving head** |
| DMX modes | **3** |
| DMX footprint | **1, 5 channels** |
| Beam angle | **65.5°** |
| Pan range | **360°** |
| Tilt range | **360°** |
| Size (W × H × D) | **192 × 238 × 188 mm** |
| GDTF fixture type | **09F90273-3E12-4E58-ADF9-AD…** |

## Controls

Effect speed · Strobe · Dimmer

## Safety-relevant functions

Strobe · Built-in effect programmes

## DMX modes

| | |
|---|---|
| 1ch | 1 ch |
| 2ch | 5 ch |
| 5ch | 5 ch |

## 1ch

1 channel

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |

## 2ch

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Reserved 2 | 0 | |
| 3 | Reserved 3 | 0 | |
| 4 | Reserved 4 | 0 | |
| 5 | Shutter / Strobe | 0 | 0–10 Open<br>11–254 Slow Strobe<br>255–255 Fast Strobe |

## 5ch

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Dimmer | 0 | 0–254 Closed<br>255–255 Open |
| 2 | Shutter / Strobe | 0 | 0–10 Open<br>11–254 Slow Strobe<br>255–255 Fast Strobe |
| 3 | Effect | 0 | 0–10 NoFeature<br>11–90 Effect1<br>91–170 Effect2<br>171–255 Effect3 |
| 4 | Effect Speed | 0 | 0–254 SlowRate<br>255–255 FastRate |
| 5 | Dimmer Mode | 0 | 0–10 As From Menu<br>11–51 NoFeature<br>52–101 Linear<br>102–152 NonLinear curve 1 (Fast)<br>153–203 NonLinear curve 1 (Mid)<br>204–255 NonLinear curve 1 (Slow) |