
ACME

ACME STAGEPAR 400 ZOOM IP (MP-400Z IP)

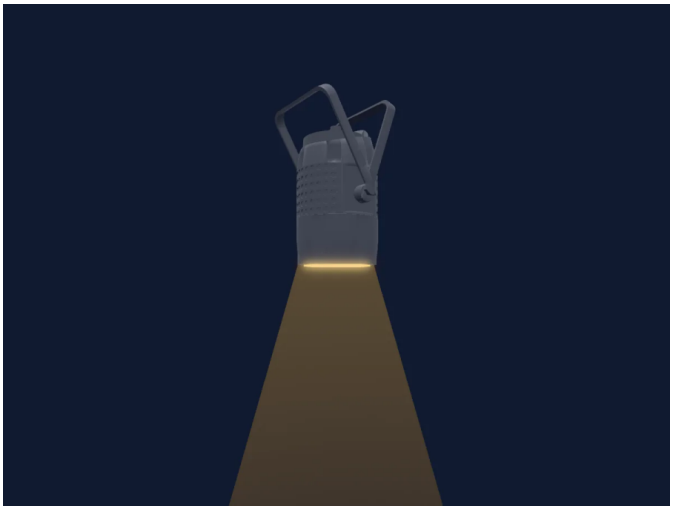

Manufacturer	**ACME**
Type	**PAR**
DMX modes	**3**
DMX footprint	**5, 7, 9 channels**
Beam angle	**11-59°**
Size (W × H × D)	**218 × 389 × 257 mm**
GDTF fixture type	**EE067FD7-B21E-4A86-9D6A-74…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe

DMX modes

Mode 3 5 DMX	5 ch
Mode 2 7 DMX	7 ch
Mode 1 9 DMX	9 ch

Mode 3 5 DMX

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Zoom	128	

Mode 2 7 DMX

7 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	0–254 Close 255–255 Open
6	Shutter1Strobe	10	0–14 Open 15–41 Max Strobe 42–42 Min Strobe 43–69 Max Strobe 70–70 Min Strobe 71–77 Min Ran Strobe 78–78 Max Ran Strobe 79–105 Max Pulse Open 106–106 Min Pulse Open 107–114 Random Burst 115–141 Max Brust Pulse 142–142 Mim Brust Pulse 143–150 Random Burst Pulse 151–177 Max Pulse Open 178–178 Min Pulse Open 179–186 Random Pulse Open 187–213 Max Pulse Close 214–214 Min Pulse Close 215–222 Random Pulse Close 223–250 Pulse Close+Open 251–255 Open 2
7	Zoom	128	

Mode 1 9 DMX

9 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	0–254 Close 255–255 Open
6	Dimmer Fine	0	Fine byte of Dimmer

Mode 1 9 DMX (continued)

Ch	Function	Default	DMX values
7	Shutter / Strobe	10	0–14 Open 15–41 Max Strobe 42–42 Min Strobe 43–69 Max Strobe 70–70 Min Strobe 71–77 Min Ran Strobe 78–78 Max Ran Strobe 79–105 Max Pulse Open 106–106 Min Pulse Open 107–114 Random Burst 115–141 Max Brust Pulse 142–142 Mim Brust Pulse 143–150 Random Burst Pulse 151–177 Max Pulse Open 178–178 Min Pulse Open 179–186 Random Pulse Open 187–213 Max Pulse Close 214–214 Min Pulse Close 215–222 Random Pulse Close 223–250 Pulse Close+Open 251–255 Open 2
8	Zoom	128	

Mode 1 9 DMX (continued)

Ch	Function	Default	DMX values
9	Color Wheel	0	0–9 Open (wheel slot 1) 10–14 Color 1 (wheel slot 2) 15–19 Color 2 (wheel slot 3) 20–24 Color 3 (wheel slot 4) 25–29 Color 4 (wheel slot 5) 30–34 Color 5 (wheel slot 6) 35–39 Color 6 (wheel slot 7) 40–44 Color 7 (wheel slot 8) 45–49 Color 8 (wheel slot 9) 50–54 Color 9 (wheel slot 10) 55–59 Color 10 (wheel slot 11) 60–64 Color 11 (wheel slot 12) 65–69 Color 12 (wheel slot 13) 70–74 Color 13 (wheel slot 14) 75–79 Color 14 (wheel slot 15) 80–84 Color 15 (wheel slot 16) 85–89 Color 16 (wheel slot 17) 90–94 Color 17 (wheel slot 18) 95–99 Color 18 (wheel slot 19) 100–104 Color 19 (wheel slot 20) 105–109 Color 20 (wheel slot 21) 110–114 Color 21 (wheel slot 22) 115–119 Color 22 (wheel slot 23) 120–124 Color 23 (wheel slot 24) 125–129 Color 24 (wheel slot 25) 130–134 Color 25 (wheel slot 26) 135–139 Color 26 (wheel slot 27) 140–144 Color 27 (wheel slot 28) 145–149 Color 28 (wheel slot 29) 150–154 Color 29 (wheel slot 30) 155–159 Color 30 (wheel slot 31) 160–164 Color 31 (wheel slot 32) 165–169 Color 32 (wheel slot 33) 170–173 Color 33 (wheel slot 34) 174–179 3200K (wheel slot 35) 180–201 4000K (wheel slot 36) 202–207 6000K (wheel slot 37) 208–229 8000k (wheel slot 38) 230–234 10000K (wheel slot 39) 235–239 Random Fast 240–244 Random Medium 245–249 Random Slow 250–255 Open2