
ACME

# ACME STAGEPAR 400 ZOOM IP (MP-400Z IP)Blank9

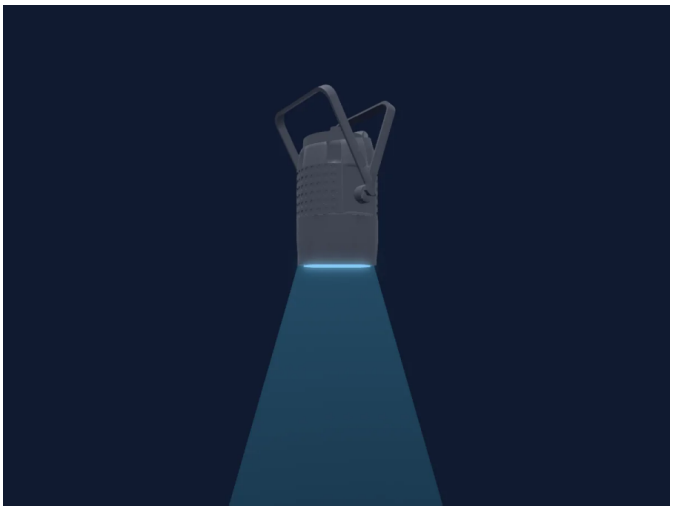

| | |
|---|---|
| Manufacturer | **ACME** |
| Type | **PAR** |
| DMX modes | **3** |
| DMX footprint | **5, 7, 8 channels** |
| Beam angle | **11-59°** |
| Size (W × H × D) | **218 × 389 × 257 mm** |
| GDTF fixture type | **60EE2EBC-347C-45E6-83E3-0A…** |

## Controls

Zoom · Extra LED colours · RGB colour mixing · Strobe · Dimmer

## Safety-relevant functions

Strobe

## DMX modes

| | |
|---|---|
| Mode 3 5 DMX | 5 ch |
| Mode 2 7 DMX | 7 ch |
| Mode 1 9 DMX | 8 ch |

## Mode 3 5 DMX

5 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | White | 0 | |
| 5 | Zoom | 128 | |

## Mode 2 7 DMX

7 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | White | 0 | |
| 5 | Dimmer | 0 | 0–254 Close<br>255–255 Open |
| 6 | Shutter1Strobe | 10 | 0–14 Open<br>15–41 Max Strobe<br>42–42 Min Strobe<br>43–69 Max Strobe<br>70–70 Min Strobe<br>71–77 Min Ran Strobe<br>78–78 Max Ran Strobe<br>79–105 Max Pulse Open<br>106–106 Min Pulse Open<br>107–114 Random Burst<br>115–141 Max Brust Pulse<br>142–142 Mim Brust Pulse<br>143–150 Random Burst Pulse<br>151–177 Max Pulse Open<br>178–178 Min Pulse Open<br>179–186 Random Pulse Open<br>187–213 Max Pulse Close<br>214–214 Min Pulse Close<br>215–222 Random Pulse Close<br>223–250 Pulse Close+Open<br>251–255 Open 2 |
| 7 | Zoom | 128 | |

## Mode 1 9 DMX

8 channels

| Ch | Function | Default | DMX values |
|---|---|---|---|
| 1 | Red | 255 | |
| 2 | Green | 255 | |
| 3 | Blue | 255 | |
| 4 | White | 0 | |
| 5 | Dimmer | 0 | 0–254 Close<br>255–255 Open |
| 6 | Dimmer Fine | 0 | Fine byte of Dimmer |

## Mode 1 9 DMX (continued)

| Ch | Function | Default | DMX values |
|---|---|---|---|
| **7** | Shutter / Strobe | 10 | 0–14 Open<br>15–41 Max Strobe<br>42–42 Min Strobe<br>43–69 Max Strobe<br>70–70 Min Strobe<br>71–77 Min Ran Strobe<br>78–78 Max Ran Strobe<br>79–105 Max Pulse Open<br>106–106 Min Pulse Open<br>107–114 Random Burst<br>115–141 Max Brust Pulse<br>142–142 Mim Brust Pulse<br>143–150 Random Burst Pulse<br>151–177 Max Pulse Open<br>178–178 Min Pulse Open<br>179–186 Random Pulse Open<br>187–213 Max Pulse Close<br>214–214 Min Pulse Close<br>215–222 Random Pulse Close<br>223–250 Pulse Close+Open<br>251–255 Open 2 |
| **8** | Zoom | 128 | |