
ACME

ACME TOUR PIXEL BAR 1010 II (TB-1010 QW II)

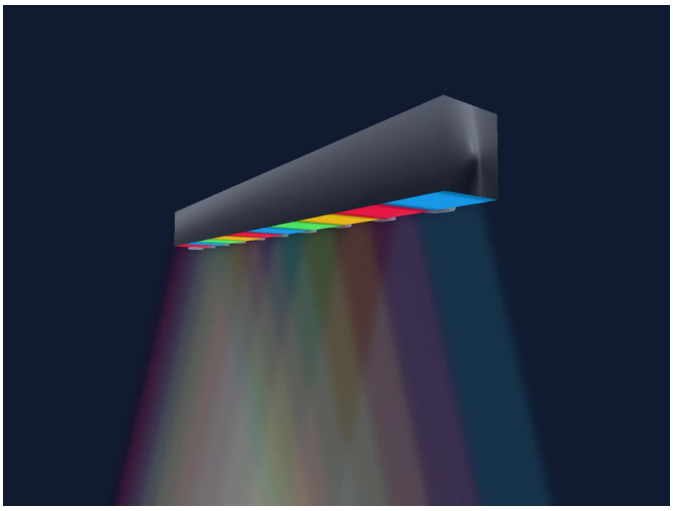

Manufacturer	**ACME**
Type	**LED bar**
DMX modes	**4**
DMX footprint	**4, 5, 7, 40 channels**
Beam angle	**25°**
Heads / cells	**10**
Size (W × H × D)	**1000 × 100 × 93 mm**
GDTF fixture type	**673E35A7-EFA1-4CE0-8657-FFB…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer · Pixel control

DMX modes

Mode 4 4 DMX	4 ch
Mode 3 5 DMX	5 ch
Mode 2 7 DMX	7 ch
Mode 1 40 DMX	40 ch

Mode 4 4 DMX

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

Mode 3 5 DMX

5 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	

Mode 2 7 DMX

7 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Color Wheel	0	0–7 Open (wheel slot 1) 8–15 Color 1 (wheel slot 2) 16–23 Color 2 (wheel slot 3) 24–30 Color 3 (wheel slot 4) 31–38 Color 4 (wheel slot 5) 39–46 Color 5 (wheel slot 6) 47–54 Color 6 (wheel slot 7) 55–61 Color 7 (wheel slot 8) 62–69 Color 8 (wheel slot 9) 70–77 Color 9 (wheel slot 10) 78–84 Color 10 (wheel slot 11) 85–92 Color 11 (wheel slot 12) 93–100 Color 12 (wheel slot 13) 101–108 Color 13 (wheel slot 14) 109–115 Color 14 (wheel slot 15) 116–123 Color 15 (wheel slot 16) 124–131 Color 16 (wheel slot 17) 132–139 Color 17 (wheel slot 18) 140–146 Color 18 (wheel slot 19) 147–154 Color 19 (wheel slot 20) 155–162 Color 20 (wheel slot 21) 163–169 Color 21 (wheel slot 22) 170–177 Color 22 (wheel slot 23) 178–185 Color 23 (wheel slot 24) 186–193 Color 24 (wheel slot 25) 194–200 Color 25 (wheel slot 26) 201–208 Color 26 (wheel slot 27) 209–216 Color 27 (wheel slot 28) 217–223 Color 28 (wheel slot 29) 224–231 Color 29 (wheel slot 30) 232–239 Color 30 (wheel slot 31) 240–247 Color 31 (wheel slot 32) 248–255 Color 32 (wheel slot 33)
6	Dimmer	0	

Mode 2 7 DMX (continued)

Ch	Function	Default	DMX values
7	Shutter1Strobe	10	0–7 Off 8–15 Open 16–130 min Strobe 131–131 max Strobe 132–139 Open 2 140–180 max Pulse Open 181–181 min Pulse Open 182–189 Open 3 190–230 max Pulse Close 231–231 min Pulse Close 232–239 Open 4 240–246 min Strobe Ran 247–247 max Strobe Ran 248–255 Open 5

Mode 1 40 DMX

40 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	0	
9	Red	255	
10	Green	255	
11	Blue	255	
12	White	0	
13	Red	255	
14	Green	255	
15	Blue	255	
16	White	0	
17	Red	255	
18	Green	255	
19	Blue	255	
20	White	0	
21	Red	255	
22	Green	255	
23	Blue	255	
24	White	0	
25	Red	255	
26	Green	255	
27	Blue	255	
28	White	0	
29	Red	255	
30	Green	255	
31	Blue	255	

Mode 1 40 DMX (continued)

Ch	Function	Default	DMX values
32	White	0	
33	Red	255	
34	Green	255	
35	Blue	255	
36	White	0	
37	Red	255	
38	Green	255	
39	Blue	255	
40	White	0	