
ACME

THUNDER IP (BL-200 CP IP)

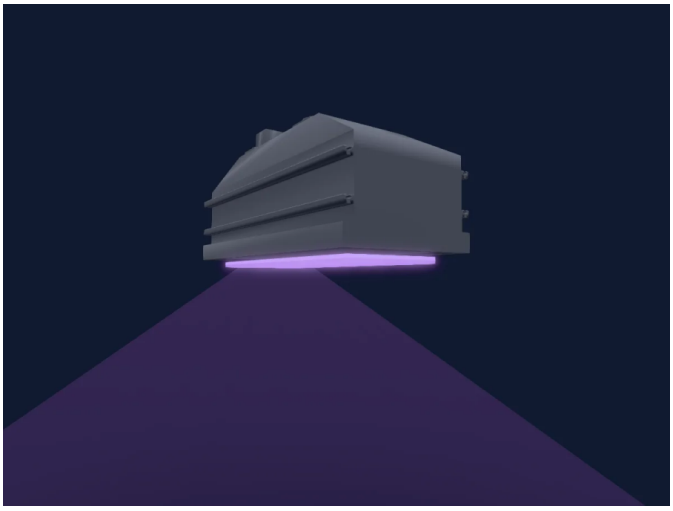

Manufacturer	**ACME**
Type	**PAR**
DMX modes	**5**
DMX footprint	**4, 8, 9, 16 channels**
Beam angle	**110°**
Heads / cells	**3**
Size (W × H × D)	**452 × 193 × 216 mm**
GDTF fixture type	**FCD3C197-24A8-41BC-9924-9D…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Dimmer · Pixel control

Safety-relevant functions

Strobe

DMX modes

Mode 1 4 DMX 8bit	4 ch
Mode 2 8 DMX 16bit	8 ch
Mode 3 8 DMX	8 ch
Mode 4 9 DMX 16bit	9 ch
Mode 5 16 DMX 3Pixel	16 ch

Mode 1 4 DMX 8bit

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

Mode 2 8 DMX 16bit

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Red Fine	255	Fine byte of Red
3	Green	255	
4	Green Fine	255	Fine byte of Green
5	Blue	255	
6	Blue Fine	255	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White

Mode 3 8 DMX

8 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Dimmer	0	
6	Strobe Duration	255	
7	Shutter / Strobe	255	0–5 Null 6–255 Shutter1Strobe 1
8	Shutter1Strobe Effect	0	0–5 Null 6–50 StrobePulseClose 51–100 StrobePulseOpen 101–150 PulseOpenClose 151–200 StrobeEffect 201–255 StrobeRandom

Mode 4 9 DMX 16bit

9 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Red Fine	255	Fine byte of Red
3	Green	255	
4	Green Fine	255	Fine byte of Green
5	Blue	255	
6	Blue Fine	255	Fine byte of Blue
7	White	0	
8	White Fine	0	Fine byte of White
9	C TO	0	

Mode 5 16 DMX 3Pixel

16 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	
5	Red	255	
6	Green	255	
7	Blue	255	
8	White	0	
9	Red	255	
10	Green	255	
11	Blue	255	
12	White	0	
13	Dimmer	0	
14	Strobe Duration	255	
15	Shutter / Strobe	255	0–5 Null 6–255 Shutter1Strobe 1
16	Shutter1Strobe Effect	0	0–5 Null 6–50 StrobePulseClose 51–100 StrobePulseOpen 101–150 PulseOpenClose 151–200 StrobeEffect 201–255 StrobeRandom