
ADJ

Element Hex IP

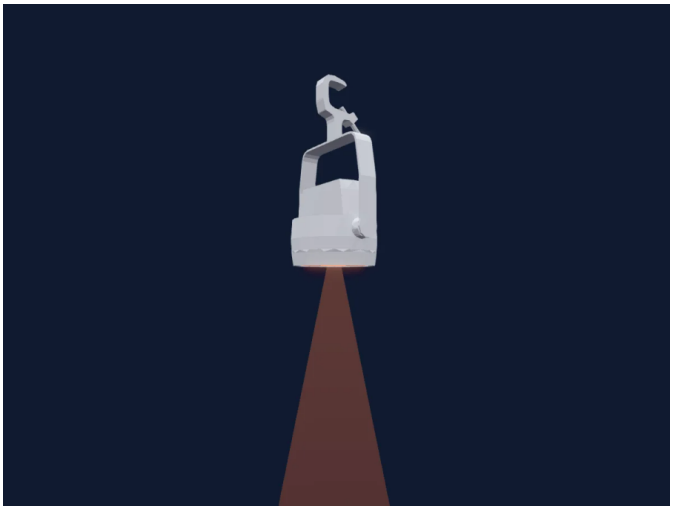

Manufacturer	**ADJ**
Type	**PAR**
DMX modes	**4**
DMX footprint	**6, 7, 8, 12 channels**
Beam angle	**23.5°**
Size (W × H × D)	**25 × 124 × 114 mm**
GDTF fixture type	**71706465-B479-4FFB-8F74-7B…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

6 channel	6 ch
7 channel	7 ch
8 channel	8 ch
12 channel	12 ch

6 channel

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add Y	0	
6	UV	0	

7 channel

7 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add Y	0	
6	UV	0	
7	Dimmer	0	

8 channel

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add Y	0	
6	UV	0	
7	Dimmer	0	
8	Shutter1Strobe	0	0–31 LED Off 32–63 LED On 64–95 Strobe Slow to Fast 96–127 LED On 1 128–159 Strobe Pulse Slow to Fast 160–191 LED On 2 192–223 Random Strobe 224–255 LED On 3

12 channel

12 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add Y	0	
6	UV	0	
7	Dimmer	0	

12 channel (continued)

Ch	Function	Default	DMX values
8	Shutter1Strobe	0	0–31 LED Off 32–63 LED On 64–95 Strobe Slow to Fast 96–127 LED On 1 128–159 Strobe Pulse Slow to Fast 160–191 LED On 2 192–223 Random Strobe 224–255 LED On 3
9	Playmode	0	
10	Color Macro1	0	
11	Color Mix MSpeed	0	
12	Dimmer Curve	0	