
ADJ

Encore Profile 1000 Color

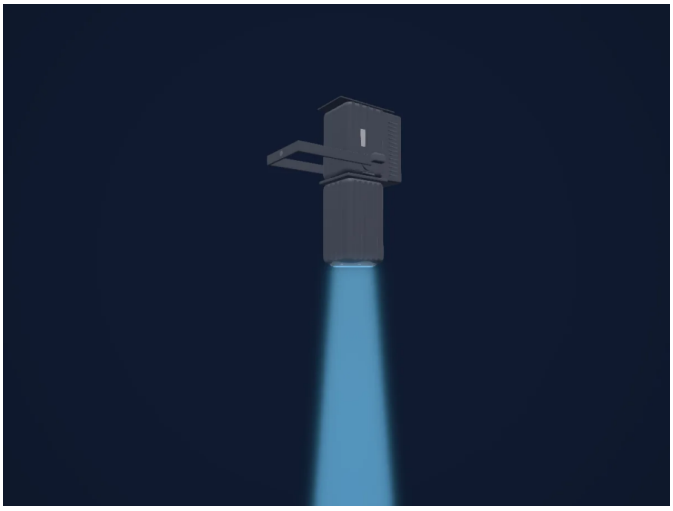

Manufacturer	**ADJ**
Type	**Profile spot**
DMX modes	**5**
DMX footprint	**4, 5, 6, 10, 11 channels**
Beam angle	**12°**
Size (W × H × D)	**300 × 576 × 473 mm**
GDTF fixture type	**BE83CB7D-F94D-5285-9344-99…**

Controls

Extra LED colours · RGB colour mixing · Colour temperature · Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

4CH	4 ch
5CH	5 ch
6CH	6 ch
10CH	10 ch
11CH	11 ch

4CH

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

5CH

5 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Dimmer	0	

6CH

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Dimmer	0	
6	Shutter / Strobe	0	0–15 Strobe off (assumed) 16–255 Strobing, slow to fast

10CH

10 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Dimmer	0	
6	Shutter / Strobe	0	0–15 Strobe off (assumed) 16–255 Strobing, slow to fast
7	Effect	0	0–51 Dimming Mode 52–102 Color Macro Mode 103–153 Color Change Mode 154–204 Color Fade Mode 205–255 Auto Run Mode

10CH (continued)

Ch	Function	Default	DMX values
8	Effect 2	0	0–0 Not used in Dimming Mode 1–4 Color1 5–8 Color2 9–12 Color3 13–15 Color4 16–16 Color Change 2 17–20 Color5 21–24 Color6 25–28 Color7 29–31 Color8 32–32 Color Change 3 33–36 Color9 37–40 Color10 41–44 Color11 45–47 Color12 48–48 Color Change 4 49–52 Color13 53–56 Color14 57–60 Color15 61–63 Color16 64–64 Color Change 5 65–68 Color17 69–72 Color18 73–76 Color19 77–79 Color20 80–80 Color Change 6 81–84 Color21 85–88 Color22 89–92 Color23 93–95 Color24 96–96 Color Change 7 97–100 Color25 101–104 Color26 105–108 Color27 109–111 Color28 112–112 Color Change 8 113–116 Color29 117–120 Color30 121–124 Color31 125–127 Color32 128–128 Color Change 9 129–132 Color33 133–136 Color34 137–140 Color35 141–143 Color36 144–144 Color Change 10 145–148 Color37 149–152 Color38 153–156 Color39 157–159 Color40 160–160 Color Change 11 161–164 Color41 165–168 Color42 169–172 Color43 173–175 Color44 176–176 Color Change 12 177–180 Color45 181–184 Color46 185–188 Color47 189–191 Color48 192–192 Color Change 13 193–196 Color49 197–200 Color50 201–204 Color51

10CH (continued)

Ch	Function	Default	DMX values
9	Effect Speed	0	
10	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default to unit setting

11CH

11 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Dimmer	0	
6	Shutter / Strobe	0	0–15 Strobe off (assumed) 16–255 Strobing, slow to fast
7	Effect	0	0–51 Dimming Mode 52–102 Color Macro Mode 103–153 Color Change Mode 154–204 Color Fade Mode 205–255 Auto Run Mode

11CH (continued)

Ch	Function	Default	DMX values
8	Effect 2	0	0–0 Not used in Dimming Mode 1–4 Color1 5–8 Color2 9–12 Color3 13–15 Color4 16–16 Color Change 2 17–20 Color5 21–24 Color6 25–28 Color7 29–31 Color8 32–32 Color Change 3 33–36 Color9 37–40 Color10 41–44 Color11 45–47 Color12 48–48 Color Change 4 49–52 Color13 53–56 Color14 57–60 Color15 61–63 Color16 64–64 Color Change 5 65–68 Color17 69–72 Color18 73–76 Color19 77–79 Color20 80–80 Color Change 6 81–84 Color21 85–88 Color22 89–92 Color23 93–95 Color24 96–96 Color Change 7 97–100 Color25 101–104 Color26 105–108 Color27 109–111 Color28 112–112 Color Change 8 113–116 Color29 117–120 Color30 121–124 Color31 125–127 Color32 128–128 Color Change 9 129–132 Color33 133–136 Color34 137–140 Color35 141–143 Color36 144–144 Color Change 10 145–148 Color37 149–152 Color38 153–156 Color39 157–159 Color40 160–160 Color Change 11 161–164 Color41 165–168 Color42 169–172 Color43 173–175 Color44 176–176 Color Change 12 177–180 Color45 181–184 Color46 185–188 Color47 189–191 Color48 192–192 Color Change 13 193–196 Color49 197–200 Color50 201–204 Color51

11CH (continued)

Ch	Function	Default	DMX values
9	Effect Speed	0	
10	C TC	0	0–28 3200K 29–57 3500K 58–86 4200K 87–114 4500K 115–142 5200K 143–170 5500K 171–198 6200K 199–226 6500K 227–255 7200K
11	Dimmer Curve	0	0–20 Standard 21–40 Stage 41–60 TV 61–80 Architectural 81–100 Theatre 101–255 Default to unit setting

Fixture model: gdtf-adj-encore-profile-1000-color-2611110704
Original HitLight geometry, scripted locally by the HitLight fixture agent from the manufacturer's published dimensional drawing, product page…
Creator: HitLight