
ADJ

Ultra Bar 9

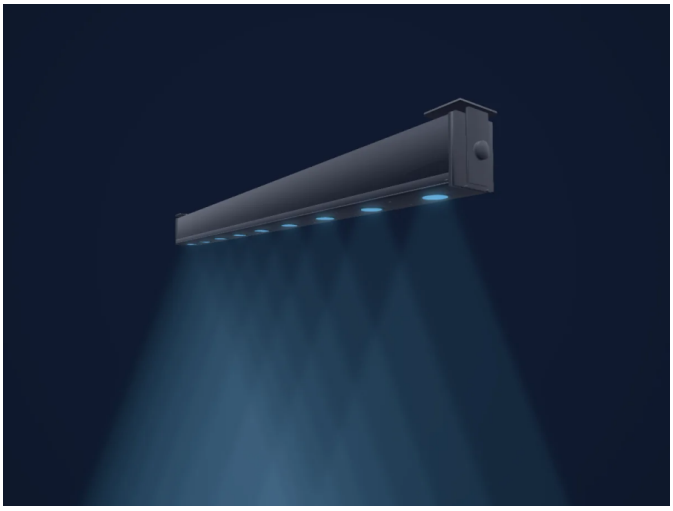

Manufacturer	**ADJ**
Type	**LED bar**
DMX modes	**7**
DMX footprint	**3, 5, 6, 7, 8, 9, 11 channels**
Beam angle	**40°**
Heads / cells	**3**
Size (W × H × D)	**1060 × 90 × 63 mm**
GDTF fixture type	**DE407D94-6557-5055-9C0C-4A…**

Controls

RGB colour mixing · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Built-in effect programmes

DMX modes

3CH (provisional researched)	3 ch
5CH (provisional researched)	5 ch
6CH (provisional researched)	6 ch
7CH (provisional researched)	7 ch
8CH (provisional researched)	8 ch
9CH (provisional researched)	9 ch
11CH (provisional researched)	11 ch

3CH (provisional researched)

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

5CH (provisional researched)

5 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Shutter / Strobe	0	0–15 Nothing (strobe off) 16–255 Strobing slow - fast
5	Dimmer	0	

6CH (provisional researched)

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Effect 2	0	0–0 Macro off (assumed byte 0: direct RGB) 1–255 Color macros (35 colours, Color Macro Chart PDF p1...
5	Shutter / Strobe	0	0–15 Nothing (strobe off) 16–255 Strobing slow - fast
6	Dimmer	0	

7CH (provisional researched)

7 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Dimmer	0	
5	Shutter / Strobe	0	0–15 Nothing (strobe off) 16–255 Strobing slow - fast
6	Effect	0	0–51 Dimmer mode 52–102 Color macro mode 103–204 Program mode 205–255 Sound active mode
7	Effect 2	0	

8CH (provisional researched)

8 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

8CH (provisional researched) (continued)

Ch	Function	Default	DMX values
4	Effect 2	0	0–0 Macro off (assumed byte 0: direct RGB) 1–255 Color macros (35 colours, Color Macro Chart PDF p1...
5	Effect	0	0–15 No function 16–25 Program 1 26–35 Program 2 36–45 Program 3 46–55 Program 4 56–65 Program 5 66–75 Program 6 76–85 Program 7 86–95 Program 8 96–105 Program 9 106–115 Program 10 116–125 Program 11 126–135 Program 12 136–145 Program 13 146–155 Program 14 156–165 Program 15 166–175 Program 16 176–185 Program 17 186–195 Program 18 196–205 Program 19 206–215 Program 20 216–225 Program 21 226–235 Program 22 236–245 Auto run 246–255 Sound active
6	Effect Speed	0	
7	Shutter / Strobe	0	0–15 Nothing (strobe off) 16–255 Strobing slow - fast
8	Dimmer	0	

9CH (provisional researched)

9 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	

11CH (provisional researched)

11 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Red	0	
5	Green	0	

11CH (provisional researched) (continued)

Ch	Function	Default	DMX values
6	Blue	0	
7	Red	0	
8	Green	0	
9	Blue	0	
10	Shutter / Strobe	0	0–15 Nothing (strobe off) 16–255 Strobing slow - fast
11	Dimmer	0	

Fixture model: gdtf-adj-ultra-bar-9-2611034202
Original HitLight parametric reconstruction. Manufacturer drawings and photographs used as dimensional and visual references; no third-part...
Creator: HitLight