
Anolis

ArcPower 4x24 TC

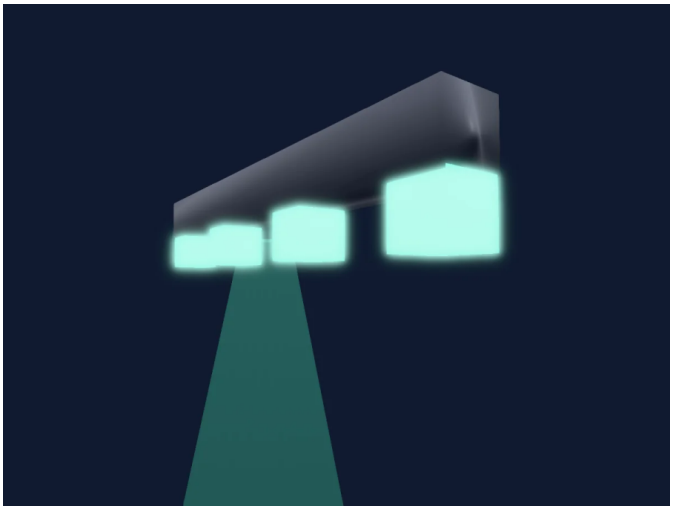

Manufacturer	**Anolis**
Type	**PAR**
DMX modes	**1**
DMX footprint	**20 channels**
Beam angle	**25°**
Size (W × H × D)	**1000 × 100 × 100 mm**
GDTF fixture type	**993C8D69-FF6C-4A9D-B82C-99…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

M4 — 20 ch

M4

20 channels

Ch	Function	Default	DMX values
1	Color Macro1	0	0–7 Normal 8–15 Color 1 16–23 Color 2 24–31 Color 3 32–39 Color 4 40–47 Color 5 48–55 Color 6 56–64 Color 7 65–71 Color 8 72–79 Color 9 80–87 Color 10 88–95 Color 11 96–103 Color 12 104–111 Color 13 112–119 Color 14 120–127 Color 15 128–135 Color 16 136–143 Color 17 144–151 Color 18 152–159 Color 19 160–167 Color 20 168–175 Color 21 176–183 Color 22 184–191 Color 23 192–199 Color 24 200–207 Color 25 208–215 Color 26 216–223 Color 27 224–231 Color 28 232–239 Color 29 240–247 Color 30 248–255 Cycle
2	Shutter1Strobe	33	0–31 Closed 32–63 Open 64–95 Strobe 0 to 10Hz 96–127 Shutter Open 2 128–143 Pulse Open + 144–159 Pulse Close + 160–191 Shutter Open 3 192–223 RND + 224–255 Shutter Open 4
3	Dimmer	0	
4	Dimmer Fine	0	Fine byte of Dimmer
5	Color RGBRed	0	
6	Color RGBGreen	0	
7	Color RGBBlue	0	
8	White	0	
9	Color RGBRed	0	
10	Color RGBGreen	0	
11	Color RGBBlue	0	
12	White	0	
13	Color RGBRed	0	
14	Color RGBGreen	0	
15	Color RGBBlue	0	
16	White	0	
17	Color RGBRed	0	

M4 (continued)

Ch	Function	Default	DMX values
18	Color RGBGreen	0	
19	Color RGBBlue	0	
20	White	0	