
Anzhee

P18x15-ZOOM

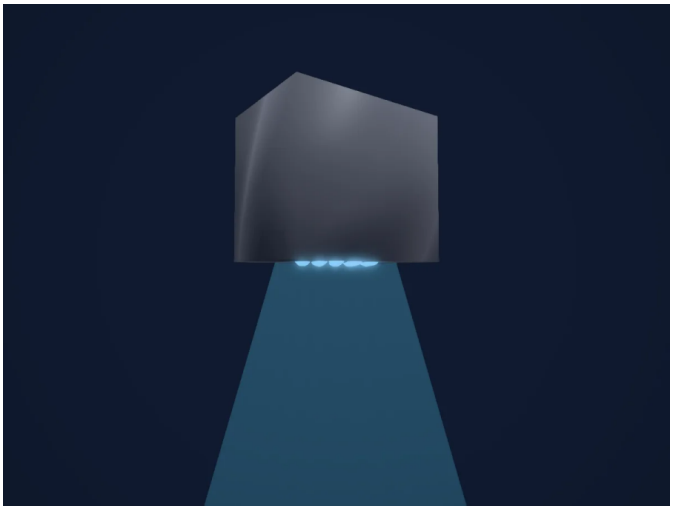

Manufacturer	**Anzhee**
Type	**PAR**
DMX modes	**1**
DMX footprint	**8 channels**
Beam angle	**10-60°**
Size (W × H × D)	**180 × 215 × 240 mm**
GDTF fixture type	**1180054F-CADE-4646-A8BB-71…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Strobe · Dimmer

DMX modes

AR2.S — 8 ch

AR2.S

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	0	0–254 Closed 255–255 Open
3	Green	0	0–254 Closed 255–255 Open
4	Blue	0	0–254 Closed 255–255 Open
5	White	0	0–254 Closed 255–255 Open
6	Color Add RY	0	0–254 Closed 255–255 Open
7	Shutter / Strobe	0	0–12 Open 13–133 Strobe · Slow 1–10.4 Hz 134–254 Strobe · Medium 10.5–19.9 Hz 255–255 Strobe · Fast 20 Hz
8	Zoom	0	0–126 Max 127–254 Medium 255–255 Min