
AVTECH

BatR3CW-WW

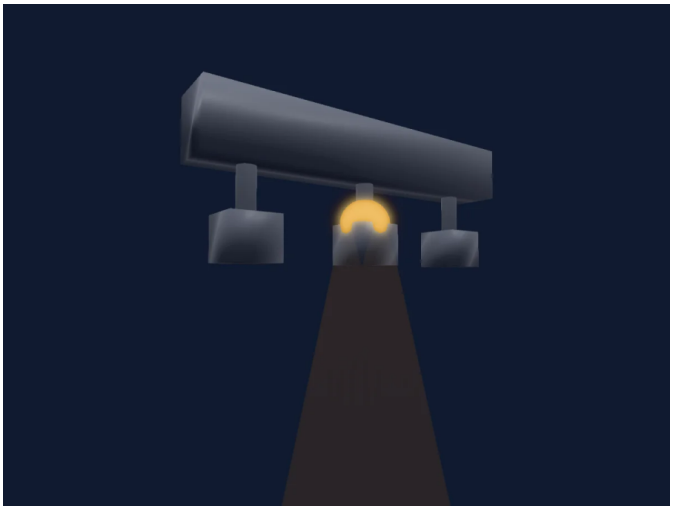

Manufacturer	**AVTECH**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**2, 5, 8, 10 channels**
Size (W × H × D)	**300 × 49 × 47 mm**
GDTF fixture type	**4AF71927-DF18-45F5-913E-974…**

Controls

Extra LED colours · Colour wheel · Effect speed · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

2 Channel	2 ch
5 Channel	5 ch
8 Channel	8 ch
10 Channel	10 ch

2 Channel

2 channels

Ch	Function	Default	DMX values
1	Color Macro1	0	
2	Shutter / Strobe	0	

5 Channel

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Add WW	0	
3	Color Add CW	0	
4	Color Macro1	0	
5	Shutter / Strobe	0	

8 Channel

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Add WW	0	
3	Color Add CW	0	
4	Color Macro1	0	
5	Shutter / Strobe	0	
6	Effect	0	0–20 No Function 21–40 Auto 1 41–60 Auto 2 61–80 Auto 3 81–100 Auto 4 101–120 Auto 5 121–130 Sound 1 131–140 Sound 2 141–150 Sound 3 151–160 Sound 4 161–170 Sound 5 171–180 Sound 6 181–190 Sound 7 191–200 Sound 8 201–210 Sound 9 211–255 Sound 10
7	Effect Speed	0	
8	Dimmer Mode	0	0–9 No Function 10–29 Linear Dimmer 30–69 Dimmer 1 Fast 70–129 Dimmer 2 130–189 Dimmer 3 190–255 Dimmer 4 Slow

10 Channel

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Add WW	0	
3	Color Add WW Fine	0	Fine byte of Color Add WW
4	Color Add CW	0	
5	Color Add CW Fine	0	Fine byte of Color Add CW

10 Channel (continued)

Ch	Function	Default	DMX values
6	Color Macro1	0	
7	Shutter / Strobe	0	
8	Effect	0	0–20 No Function 21–40 Auto 1 41–60 Auto 2 61–80 Auto 3 81–100 Auto 4 101–120 Auto 5 121–130 Sound 1 131–140 Sound 2 141–150 Sound 3 151–160 Sound 4 161–170 Sound 5 171–180 Sound 6 181–190 Sound 7 191–200 Sound 8 201–210 Sound 9 211–255 Sound 10
9	Effect Speed	0	
10	Dimmer Mode	0	0–9 No Function 10–29 Linear Dimmer 30–69 Dimmer 1 Fast 70–129 Dimmer 2 130–189 Dimmer 3 190–255 Dimmer 4 Slow