
AVTECH

BatWall2410IP

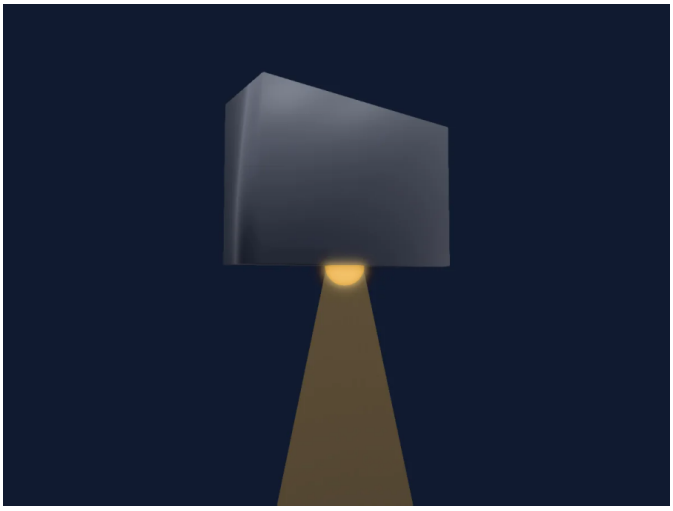

Manufacturer	**AVTECH**
Type	**PAR**
DMX modes	**5**
DMX footprint	**2, 3, 5, 8, 11 channels**
Size (W × H × D)	**460 × 315 × 168 mm**
GDTF fixture type	**CDA07583-3A72-4B25-A986-B8…**

Controls

Extra LED colours · Hue and saturation · RGB colour mixing · Colour temperature · Colour wheel · Dimmer

DMX modes

2 Channels	2 ch
3 Channels	3 ch
5 Channels	5 ch
8 Channels	8 ch
11 Channels	11 ch

2 Channels

2 channels

Ch	Function	Default	DMX values
1	Color Macro1	0	
2	C TO	0	0–0 No Function 1–23 2500k 24–47 3000k 48–71 3500k 72–95 4000k 96–119 4500k 120–143 5000k 144–167 6000k 168–191 7000k 192–215 8000k 216–239 9000k 240–255 10000k

3 Channels

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	
2	H SBSaturation	0	
3	H SBBrightness	0	

5 Channels

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color RGBRed	0	
3	Color RGBGreen	0	
4	Color RGBBlue	0	
5	White	0	

8 Channels

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Shutter	0	0–9 Open 10–189 Strobe Slow to Fast 190–199 Open 200–249 Random Slow to Fast 250–255 Open
3	Color RGBRed	0	
4	Color RGBGreen	0	
5	Color RGBBlue	0	
6	White	0	

8 Channels (continued)

Ch	Function	Default	DMX values
7	Color Effects1	0	0–7 No Function 8–23 Auto 1 24–39 Auto 2 40–55 Auto 3 56–71 Auto 4 72–87 Auto 5 88–103 Auto 6 104–119 Auto 7 120–135 Auto 8 136–151 Auto 9 152–167 Auto 10 168–183 Custom 1 184–199 Custom 2 200–215 Custom 3 216–255 Custom 4
8	Color Mix MSpeed	0	

11 Channels

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Shutter	0	0–9 Open 10–189 Strobe Slow to Fast 190–199 Open 200–249 Random Slow to Fast 250–255 Open
3	Color RGBRed	0	
4	Color RGBGreen	0	
5	Color RGBBlue	0	
6	White	0	
7	Color Macro1	0	
8	C TO	0	0–0 No Function 1–23 2500k 24–47 3000k 48–71 3500k 72–95 4000k 96–119 4500k 120–143 5000k 144–167 6000k 168–191 7000k 192–215 8000k 216–239 9000k 240–255 10000k
9	Color Effects1	0	0–7 No Function 8–23 Auto 1 24–39 Auto 2 40–55 Auto 3 56–71 Auto 4 72–87 Auto 5 88–103 Auto 6 104–119 Auto 7 120–135 Auto 8 136–151 Auto 9 152–167 Auto 10 168–183 Custom 1 184–199 Custom 2 200–215 Custom 3 216–255 Custom 4

11 Channels (continued)

Ch	Function	Default	DMX values
10	Color Mix MSpeed	0	
11	I DAdress	0	