
BeamZ

Attack Combi Strobe cWwWRGB

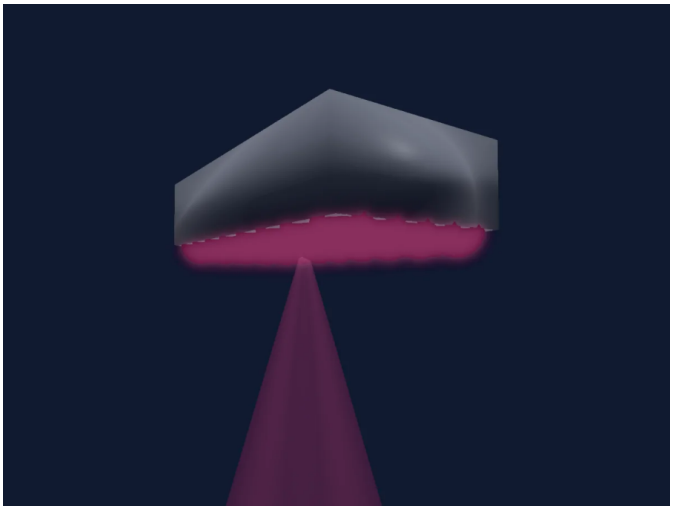

Manufacturer	**BeamZ**
Type	**Blinder**
DMX modes	**4**
DMX footprint	**5, 11, 97 channels**
Beam angle	**4-63°**
Size (W × H × D)	**404 × 90 × 204 mm**
GDTF fixture type	**4B8EDBA8-B0B5-4849-B2A2-58…**

Controls

RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

5 Ch RGB_wW_cW	5 ch
11 Ch Ext	11 ch
112 Ch Pixel	97 ch
112 Ch Pixel + Virtual Dimmer	97 ch

5 Ch RGB_wW_cW

5 channels

Ch	Function	Default	DMX values
1	Red	0	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100
2	Green	0	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100
3	Blue	0	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100
4	Dimmer	0	0–63 000 64–127 025 128–190 050 191–253 075 254–255 100
5	Dimmer	0	0–63 000 64–127 025 128–190 050 191–253 075 254–255 100

11 Ch Ext

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–63 000 64–127 025 128–190 050 191–253 075 254–255 100
2	Shutter / Strobe	0	0–9 Open 10–70 Shutter1 StrobeRate · 001 1–5.18 Hz 71–131 Shutter1 StrobeRate · 025 5.25–9.43 Hz 132–192 Shutter1 StrobeRate · 050 9.5–13.7 Hz 193–253 Shutter1 StrobeRate · 075 13.8–17.9 Hz 254–254 Shutter1 StrobeRate · 100 18 Hz 255–255 Open
3	Red	255	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100
4	Green	255	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100
5	Blue	255	0–62 000 63–126 025 127–190 050 191–254 075 255–255 100

11 Ch Ext (continued)

Ch	Function	Default	DMX values
6	Dimmer	255	0–63 000 64–127 025 128–190 050 191–253 075 254–255 100
7	Dimmer	255	0–63 000 64–127 025 128–190 050 191–253 075 254–255 100
8	Effect 2	0	0–31 No Function 32–63 Wheel Slot 1 (wheel slot 1) 64–95 Wheel Slot 2 (wheel slot 2) 96–127 Wheel Slot 3 (wheel slot 3) 128–159 Wheel Slot 4 (wheel slot 4) 160–191 Wheel Slot 5 (wheel slot 5) 192–223 Wheel Slot 6 (wheel slot 6) 224–255 Wheel Slot 7 (wheel slot 7)

11 Ch Ext (continued)

Ch	Function	Default	DMX values
9	Effect	0	0–9 Effects1 No Function 10–14 Wheel Slot 1 (wheel slot 1) 15–19 Wheel Slot 2 (wheel slot 2) 20–24 Wheel Slot 3 (wheel slot 3) 25–29 Wheel Slot 4 (wheel slot 4) 30–34 Wheel Slot 5 (wheel slot 5) 35–39 Wheel Slot 6 (wheel slot 6) 40–44 Wheel Slot 7 (wheel slot 7) 45–49 Wheel Slot 8 (wheel slot 8) 50–54 Wheel Slot 9 (wheel slot 9) 55–59 Wheel Slot 10 (wheel slot 10) 60–64 Wheel Slot 11 (wheel slot 11) 65–69 Wheel Slot 12 (wheel slot 12) 70–74 Wheel Slot 13 (wheel slot 13) 75–79 Wheel Slot 14 (wheel slot 14) 80–84 Wheel Slot 15 (wheel slot 15) 85–89 Wheel Slot 16 (wheel slot 16) 90–94 Wheel Slot 17 (wheel slot 17) 95–99 Wheel Slot 18 (wheel slot 18) 100–104 Wheel Slot 19 (wheel slot 19) 105–109 Wheel Slot 20 (wheel slot 20) 110–114 Wheel Slot 21 (wheel slot 21) 115–119 Wheel Slot 22 (wheel slot 22) 120–125 Wheel Slot 23 (wheel slot 23) 126–130 Wheel Slot 24 (wheel slot 24) 131–135 Wheel Slot 25 (wheel slot 25) 136–140 Wheel Slot 26 (wheel slot 26) 141–145 Wheel Slot 27 (wheel slot 27) 146–150 Wheel Slot 28 (wheel slot 28) 151–155 Wheel Slot 29 (wheel slot 29) 156–160 Wheel Slot 30 (wheel slot 30) 161–165 Wheel Slot 31 (wheel slot 31) 166–170 Wheel Slot 32 (wheel slot 32) 171–175 Wheel Slot 33 (wheel slot 33) 176–180 Wheel Slot 34 (wheel slot 34) 181–185 Wheel Slot 35 (wheel slot 35) 186–190 Wheel Slot 36 (wheel slot 36) 191–195 Wheel Slot 37 (wheel slot 37) 196–200 Wheel Slot 38 (wheel slot 38) 201–205 Wheel Slot 39 (wheel slot 39) 206–210 Wheel Slot 40 (wheel slot 40) 211–215 Wheel Slot 41 (wheel slot 41) 216–220 Wheel Slot 42 (wheel slot 42) 221–225 Wheel Slot 43 (wheel slot 43) 226–230 Wheel Slot 44 (wheel slot 44) 231–255 Sound-to-Light
10	Effect Speed	0	0–63 000 64–127 025 128–191 050 192–254 075 255–255 100
11	Effects1Adjust1	0	0–39 RGB 40–79 wW 80–119 cW 120–159 RGB+wW 160–199 RGB+cW 200–239 wW+cW 240–255 RGB+wW+cW

112 Ch Pixel

97 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Reserved 4	0	
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	

112 Ch Pixel (continued)

Ch	Function	Default	DMX values
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Reserved 50	0	
51	Reserved 51	0	
52	Reserved 52	0	
53	Reserved 53	0	
54	Reserved 54	0	
55	Reserved 55	0	
56	Reserved 56	0	
57	Reserved 57	0	
58	Reserved 58	0	
59	Reserved 59	0	
60	Reserved 60	0	
61	Reserved 61	0	
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Reserved 65	0	
66	Reserved 66	0	
67	Reserved 67	0	
68	Reserved 68	0	
69	Reserved 69	0	
70	Reserved 70	0	
71	Reserved 71	0	
72	Reserved 72	0	
73	Dimmer	0	
74	Reserved 74	0	
75	Reserved 75	0	
76	Reserved 76	0	
77	Reserved 77	0	
78	Reserved 78	0	
79	Reserved 79	0	
80	Reserved 80	0	
81	Reserved 81	0	
82	Reserved 82	0	
83	Reserved 83	0	
84	Reserved 84	0	
85	Reserved 85	0	
86	Reserved 86	0	
87	Reserved 87	0	
88	Reserved 88	0	
89	Reserved 89	0	
90	Reserved 90	0	

112 Ch Pixel (continued)

Ch	Function	Default	DMX values
91	Reserved 91	0	
92	Reserved 92	0	
93	Reserved 93	0	
94	Reserved 94	0	
95	Reserved 95	0	
96	Reserved 96	0	
97	Dimmer	0	

112 Ch Pixel + Virtual Dimmer

97 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Reserved 4	0	
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	

112 Ch Pixel + Virtual Dimmer (continued)

Ch	Function	Default	DMX values
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Reserved 50	0	
51	Reserved 51	0	
52	Reserved 52	0	
53	Reserved 53	0	
54	Reserved 54	0	
55	Reserved 55	0	
56	Reserved 56	0	
57	Reserved 57	0	
58	Reserved 58	0	
59	Reserved 59	0	
60	Reserved 60	0	
61	Reserved 61	0	
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Reserved 65	0	
66	Reserved 66	0	
67	Reserved 67	0	
68	Reserved 68	0	
69	Reserved 69	0	
70	Reserved 70	0	
71	Reserved 71	0	
72	Reserved 72	0	
73	Dimmer	255	
74	Reserved 74	0	
75	Reserved 75	0	
76	Reserved 76	0	
77	Reserved 77	0	
78	Reserved 78	0	
79	Reserved 79	0	

112 Ch Pixel + Virtual Dimmer (continued)

Ch	Function	Default	DMX values
80	Reserved 80	0	
81	Reserved 81	0	
82	Reserved 82	0	
83	Reserved 83	0	
84	Reserved 84	0	
85	Reserved 85	0	
86	Reserved 86	0	
87	Reserved 87	0	
88	Reserved 88	0	
89	Reserved 89	0	
90	Reserved 90	0	
91	Reserved 91	0	
92	Reserved 92	0	
93	Reserved 93	0	
94	Reserved 94	0	
95	Reserved 95	0	
96	Reserved 96	0	
97	Dimmer	255	