
BeamZ

bbp54

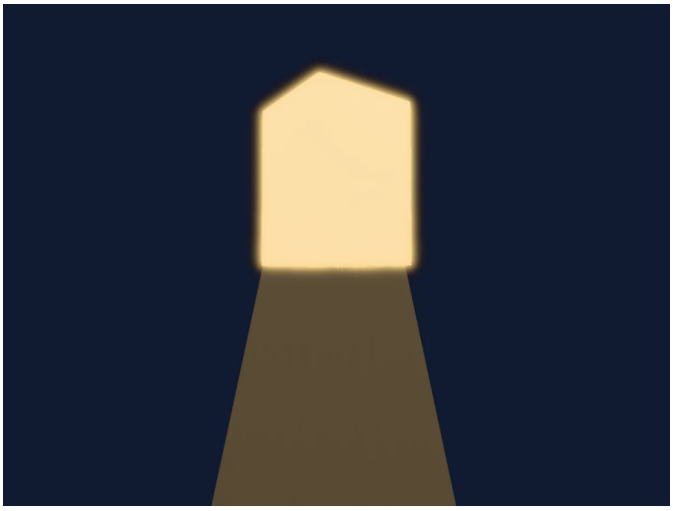

Manufacturer	**BeamZ**
Type	**PAR**
DMX modes	**2**
DMX footprint	**6, 12 channels**
Beam angle	**25°**
Size (W × H × D)	**100 × 150 × 100 mm**
GDTF fixture type	**CEFBAF04-561A-457D-BF9C-4A…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Dimmer

DMX modes

6 channel	6 ch
12 channel	12 ch

6 channel

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add RY	0	
6	UV	0	

12 channel

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Add RY	0	
7	UV	0	
8	Shutter1Strobe	0	0–4 no function 5–255 strobe slow to fast
9	Color Effects1	0	0–4 no function 5–127 40 colors 128–255 63 colors
10	Color1Mode	0	0–19 no function 20–87 color fade 88–155 color jump 156–223 color pulse 224–255 sound control
11	Effect Speed	0	
12	Dimmer Curve	0	0–5 control panel 6–55 dimmer curve 0 56–105 dimmer curve 1 106–155 dimmer curve 2 156–205 dimmer curve 3 206–255 dimmer curve 4