
BeamZ

BBP59 Battery Uplight

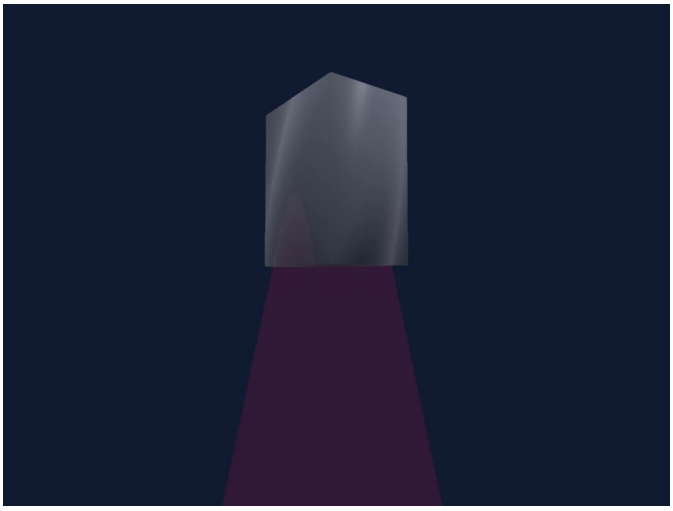

Manufacturer	**BeamZ**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**6, 12 channels**
Beam angle	**25°**
Size (W × H × D)	**143 × 190 × 105 mm**
GDTF fixture type	**EA9C656F-B0CD-46BE-9BBD-A…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

D001 6 Channels	6 ch
A001 12 Channels	12 ch

D001 6 Channels

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add RY	0	
6	UV	0	

A001 12 Channels

12 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Add RY	0	
7	UV	0	
8	Shutter / Strobe	0	0–4 No function 5–255 strobe slow/fast
9	Color Effects1	0	0–7 No function 8–127 40 preset colors 128–255 36 factory colors
10	Effect	0	0–19 No function 20–87 Color fade 88–155 Color jump 156–223 Color pulse 224–255 Sound control
11	Effect Speed	0	
12	Dimmer Curve	0	0–5 Control panel 6–55 Dimmer curve 0 56–105 Dimmer curve 1 106–155 Dimmer curve 2 156–205 Dimmer curve 3 206–255 Dimmer curve 4