
BeamZ

BBP96 Battery Uplight

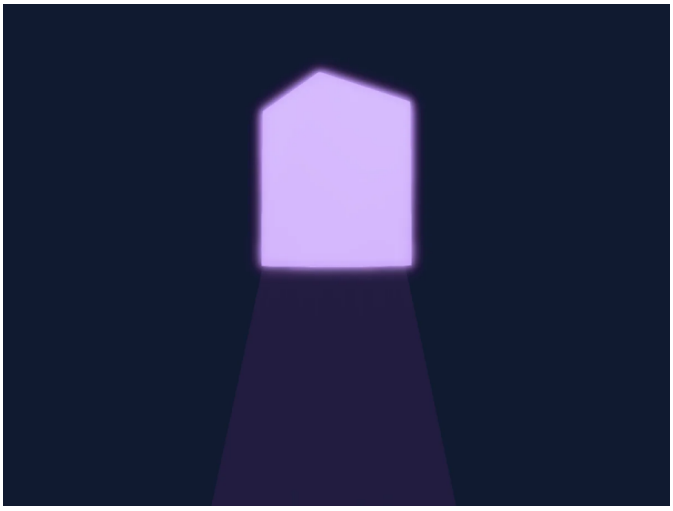

Manufacturer	**BeamZ**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**6, 9 channels**
Beam angle	**25°**
Size (W × H × D)	**100 × 150 × 100 mm**
GDTF fixture type	**5E01272E-DDBA-4E6F-8387-E3…**

Controls

Extra LED colours · RGB colour mixing · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

6 Channels	6 ch
10 Channels	9 ch

6 Channels

6 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Color Add RY	0	
6	UV	0	

10 Channels

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Add RY	0	
7	UV	0	
8	Shutter / Strobe	0	
9	Effect	0	0–8 No Function 9–50 Color selection 51–100 Color gradual 101–150 Color jumping 151–200 Color pulse 201–220 Sound 1 221–240 Sound 2 241–255 Sound 3