
BeamZ

BTF200CZ Fresnel Zoom 200W LED RGBW

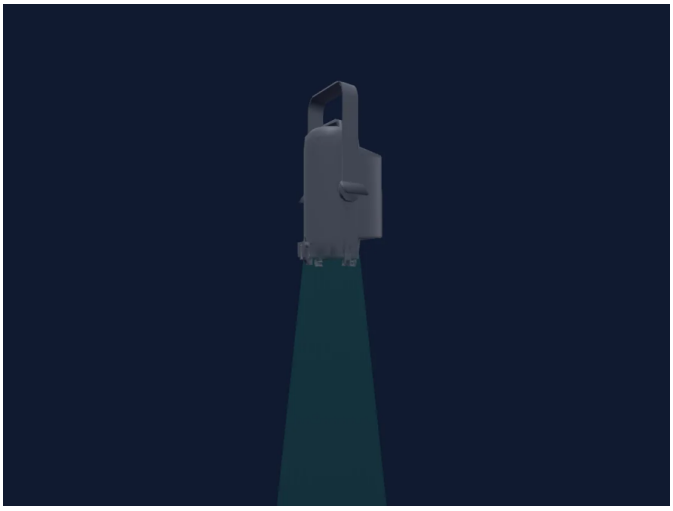

Manufacturer	**BeamZ**
Type	**Spot**
DMX modes	**7**
DMX footprint	**3, 4, 5, 6, 11 channels**
Beam angle	**14°**
Size (W × H × D)	**100 × 260 × 150 mm**
GDTF fixture type	**3545AB31-B8B1-47D0-B3DD-7…**

Controls

Zoom · Extra LED colours · Hue and saturation · RGB colour mixing · Colour wheel · Effect speed · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

Arc1	3 ch
HSV	3 ch
AR-2	4 ch
AR1-D	4 ch
AR2-D	5 ch
AR2-S	6 ch
STAG	11 ch

Arc1

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

HSV

3 channels

Ch	Function	Default	DMX values
1	H SBHue	0	
2	H SBSaturation	0	
3	H SBBrightness	0	

AR-2

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

AR1-D

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	

AR2-D

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	

AR2-S

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Shutter / Strobe	0	

STAG

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–24 0% 25–50 10% 51–63 20% 64–75 25% 76–101 30% 102–127 40% 128–152 50% 153–178 60% 179–190 70% 191–203 75% 204–228 80% 229–254 90% 255–255 100%
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Macro1	0	
7	Shutter / Strobe	0	
8	Zoom	0	
9	Effect	0	
10	Effect Speed	0	
11	Function	0	