
BeamZ

COB50RGBWA PAR

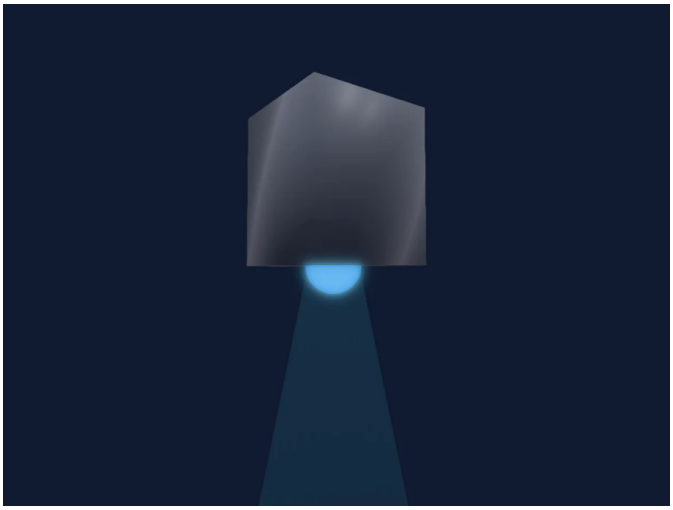

Manufacturer	**BeamZ**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**3, 4, 5, 9 channels**
Size (W × H × D)	**250 × 300 × 250 mm**
GDTF fixture type	**A00A6E1A-143A-4747-9B53-3B…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

3 Channels	3 ch
4 Channels	4 ch
5 Channels	5 ch
9 Channels	9 ch

3 Channels

3 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	

4 Channels

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

5 Channels

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	
3	Color Macro1	0	
4	Effect	0	
5	Effect Speed	0	

9 Channels

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Color Add RY	0	
7	Shutter / Strobe	0	0–9 Shutter1 1 10–255 StrobeModeStrobe 2
8	Effect	0	0–50 Manual Mode 51–100 Jump Variable 101–150 Gradual Variable 151–200 Pulse Variable 201–250 Auto Mode 251–255 Sound Mode
9	Effect Speed	0	