
BeamZ

Kratos LED Tube

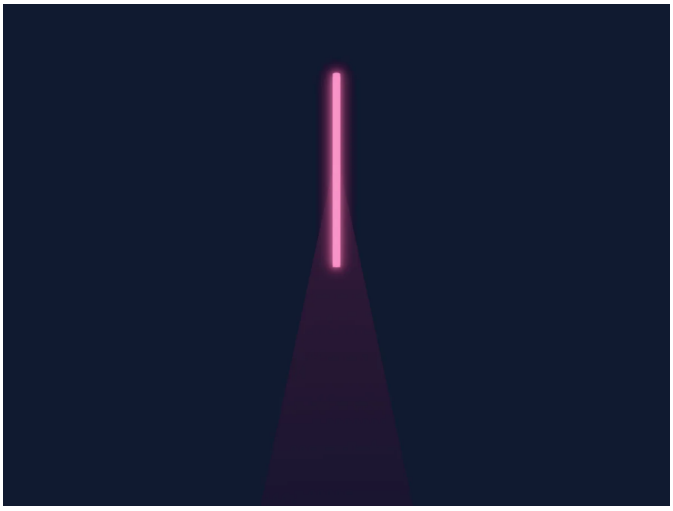

Manufacturer	**BeamZ**
Type	**Profile spot**
DMX modes	**7**
DMX footprint	**2, 4, 6, 11, 32, 64, 128 channels**
Beam angle	**25°**
Size (W × H × D)	**42 × 1035 × 42 mm**
GDTF fixture type	**CA7B14B7-4E44-4146-BF2A-84…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

2 channels	2 ch
4 channels	4 ch
6 channels	6 ch
11 channels	11 ch
32 channels	32 ch
64 channel	64 ch
128 channels	128 ch

2 channels

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Color Consistency	0	0–10 No function 11–24 2800K 25–38 3000K 39–52 3200K 53–66 3500K 67–80 3800K 81–94 4000K 95–108 4500K 109–122 5000K 123–136 5600K 137–150 6000K 151–164 6500K 165–178 7000K 179–192 7500K 193–206 8000K 207–220 8500K 221–234 9000K 235–248 9500K 249–255 10000K

4 channels

4 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	
4	White	0	

6 channels

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–10 No function 11–255 Slow to fast
3	Color RGBRed	0	
4	Color RGBGreen	0	
5	Color RGBBlue	0	
6	White	0	

11 channels

11 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–10 No function 11–255 Slow to fast
3	Color Macro1	0	0–10 No function 11–255 17 values for each color
4	Color Macro2	0	0–10 No function 11–255 17 values for each color
5	Color Macro3	0	

11 channels (continued)

Ch	Function	Default	DMX values
6	Color Macro1Rate	0	0–10 No effect 11–220 3 values 221–228 Sound control 1 229–236 Sound control 2 237–244 No function 245–255 Sound control 3
7	Shaper Macros Speed	0	
8	Color RGBRed	0	
9	Color RGBGreen	0	
10	Color RGBBlue	0	
11	White	0	

32 channels

32 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	
4	White	0	
5	Color RGBRed	0	
6	Color RGBGreen	0	
7	Color RGBBlue	0	
8	White	0	
9	Color RGBRed	0	
10	Color RGBGreen	0	
11	Color RGBBlue	0	
12	White	0	
13	Color RGBRed	0	
14	Color RGBGreen	0	
15	Color RGBBlue	0	
16	White	0	
17	Color RGBRed	0	
18	Color RGBGreen	0	
19	Color RGBBlue	0	
20	White	0	
21	Color RGBRed	0	
22	Color RGBGreen	0	
23	Color RGBBlue	0	
24	White	0	
25	Color RGBRed	0	
26	Color RGBGreen	0	
27	Color RGBBlue	0	
28	White	0	
29	Color RGBRed	0	
30	Color RGBGreen	0	
31	Color RGBBlue	0	
32	White	0	

64 channel

64 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	
4	White	0	
5	Color RGBRed	0	
6	Color RGBGreen	0	
7	Color RGBBlue	0	
8	White	0	
9	Color RGBRed	0	
10	Color RGBGreen	0	
11	Color RGBBlue	0	
12	White	0	
13	Color RGBRed	0	
14	Color RGBGreen	0	
15	Color RGBBlue	0	
16	White	0	
17	Color RGBRed	0	
18	Color RGBGreen	0	
19	Color RGBBlue	0	
20	White	0	
21	Color RGBRed	0	
22	Color RGBGreen	0	
23	Color RGBBlue	0	
24	White	0	
25	Color RGBRed	0	
26	Color RGBGreen	0	
27	Color RGBBlue	0	
28	White	0	
29	Color RGBRed	0	
30	Color RGBGreen	0	
31	Color RGBBlue	0	
32	White	0	
33	Color RGBRed	0	
34	Color RGBGreen	0	
35	Color RGBBlue	0	
36	White	0	
37	Color RGBRed	0	
38	Color RGBGreen	0	
39	Color RGBBlue	0	
40	White	0	
41	Color RGBRed	0	
42	Color RGBGreen	0	
43	Color RGBBlue	0	
44	White	0	
45	Color RGBRed	0	

64 channel (continued)

Ch	Function	Default	DMX values
46	Color RGBGreen	0	
47	Color RGBBlue	0	
48	White	0	
49	Color RGBRed	0	
50	Color RGBGreen	0	
51	Color RGBBlue	0	
52	White	0	
53	Color RGBRed	0	
54	Color RGBGreen	0	
55	Color RGBBlue	0	
56	White	0	
57	Color RGBRed	0	
58	Color RGBGreen	0	
59	Color RGBBlue	0	
60	White	0	
61	Color RGBRed	0	
62	Color RGBGreen	0	
63	Color RGBBlue	0	
64	White	0	

128 channels

128 channels

Ch	Function	Default	DMX values
1	Color RGBRed	0	
2	Color RGBGreen	0	
3	Color RGBBlue	0	
4	White	0	
5	Color RGBRed	0	
6	Color RGBGreen	0	
7	Color RGBBlue	0	
8	White	0	
9	Color RGBRed	0	
10	Color RGBGreen	0	
11	Color RGBBlue	0	
12	White	0	
13	Color RGBRed	0	
14	Color RGBGreen	0	
15	Color RGBBlue	0	
16	White	0	
17	Color RGBRed	0	
18	Color RGBGreen	0	
19	Color RGBBlue	0	
20	White	0	
21	Color RGBRed	0	
22	Color RGBGreen	0	

128 channels (continued)

Ch	Function	Default	DMX values
23	Color RGBBlue	0	
24	White	0	
25	Color RGBRed	0	
26	Color RGBGreen	0	
27	Color RGBBlue	0	
28	White	0	
29	Color RGBRed	0	
30	Color RGBGreen	0	
31	Color RGBBlue	0	
32	White	0	
33	Color RGBRed	0	
34	Color RGBGreen	0	
35	Color RGBBlue	0	
36	White	0	
37	Color RGBRed	0	
38	Color RGBGreen	0	
39	Color RGBBlue	0	
40	White	0	
41	Color RGBRed	0	
42	Color RGBGreen	0	
43	Color RGBBlue	0	
44	White	0	
45	Color RGBRed	0	
46	Color RGBGreen	0	
47	Color RGBBlue	0	
48	White	0	
49	Color RGBRed	0	
50	Color RGBGreen	0	
51	Color RGBBlue	0	
52	White	0	
53	Color RGBRed	0	
54	Color RGBGreen	0	
55	Color RGBBlue	0	
56	White	0	
57	Color RGBRed	0	
58	Color RGBGreen	0	
59	Color RGBBlue	0	
60	White	0	
61	Color RGBRed	0	
62	Color RGBGreen	0	
63	Color RGBBlue	0	
64	White	0	
65	Color RGBRed	0	
66	Color RGBGreen	0	
67	Color RGBBlue	0	

128 channels (continued)

Ch	Function	Default	DMX values
68	White	0	
69	Color RGBRed	0	
70	Color RGBGreen	0	
71	Color RGBBlue	0	
72	White	0	
73	Color RGBRed	0	
74	Color RGBGreen	0	
75	Color RGBBlue	0	
76	White	0	
77	Color RGBRed	0	
78	Color RGBGreen	0	
79	Color RGBBlue	0	
80	White	0	
81	Color RGBRed	0	
82	Color RGBGreen	0	
83	Color RGBBlue	0	
84	White	0	
85	Color RGBRed	0	
86	Color RGBGreen	0	
87	Color RGBBlue	0	
88	White	0	
89	Color RGBRed	0	
90	Color RGBGreen	0	
91	Color RGBBlue	0	
92	White	0	
93	Color RGBRed	0	
94	Color RGBGreen	0	
95	Color RGBBlue	0	
96	White	0	
97	Color RGBRed	0	
98	Color RGBGreen	0	
99	Color RGBBlue	0	
100	White	0	
101	Color RGBRed	0	
102	Color RGBGreen	0	
103	Color RGBBlue	0	
104	White	0	
105	Color RGBRed	0	
106	Color RGBGreen	0	
107	Color RGBBlue	0	
108	White	0	
109	Color RGBRed	0	
110	Color RGBGreen	0	
111	Color RGBBlue	0	
112	White	0	

128 channels (continued)

Ch	Function	Default	DMX values
113	Color RGBRed	0	
114	Color RGBGreen	0	
115	Color RGBBlue	0	
116	White	0	
117	Color RGBRed	0	
118	Color RGBGreen	0	
119	Color RGBBlue	0	
120	White	0	
121	Color RGBRed	0	
122	Color RGBGreen	0	
123	Color RGBBlue	0	
124	White	0	
125	Color RGBRed	0	
126	Color RGBGreen	0	
127	Color RGBBlue	0	
128	White	0	