
BeamZ

LCB-320

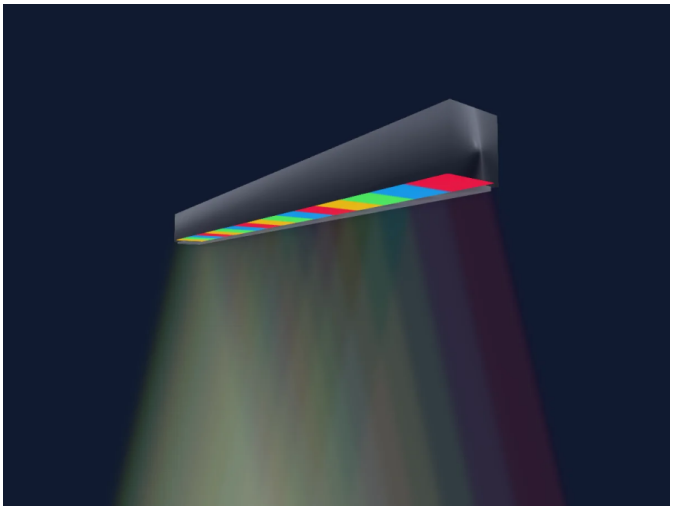

Manufacturer	**BeamZ**
Type	**LED bar**
DMX modes	**1**
DMX footprint	**50 channels**
Beam angle	**25°**
Heads / cells	**16**
Size (W × H × D)	**1000 × 80 × 80 mm**
GDTF fixture type	**7255A29B-CD12-42B4-AFBC-F…**

Controls

Pixel control

DMX modes

50ch Mode	50 ch

50ch Mode

50 channels

Ch	Function	Default	DMX values
1	Function	0	0–9 Dimmer 10–19 StrobeMode 20–29 Mode 1 30–39 Mode 2 40–49 Mode 3 50–59 Mode 4 60–69 Mode 5 70–79 Mode 6 80–89 Mode 7 90–99 Mode 8 100–109 Mode 9 110–119 Mode 10 120–129 Mode 11 130–139 Mode 12 140–149 Mode 13 150–159 Mode 14 160–169 Mode 15 170–179 Mode 16 180–189 Mode 17 190–199 Mode 18 200–209 Mode 19 210–219 Mode 20 220–229 Sound 1 230–239 Sound 2 240–255 Sound 3
2	Global MSpeed	0	
3	Red	0	
4	Green	0	
5	Blue	0	
6	Red	0	
7	Green	0	
8	Blue	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	Red	0	
13	Green	0	
14	Blue	0	
15	Red	0	
16	Green	0	
17	Blue	0	
18	Red	0	
19	Green	0	
20	Blue	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	Red	0	
25	Green	0	
26	Blue	0	
27	Red	0	
28	Green	0	

50ch Mode (continued)

Ch	Function	Default	DMX values
29	Blue	0	
30	Red	0	
31	Green	0	
32	Blue	0	
33	Red	0	
34	Green	0	
35	Blue	0	
36	Red	0	
37	Green	0	
38	Blue	0	
39	Red	0	
40	Green	0	
41	Blue	0	
42	Red	0	
43	Green	0	
44	Blue	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	Red	0	
49	Green	0	
50	Blue	0	