
BeamZ

LCB300 LED BAR 36x 3 Watt

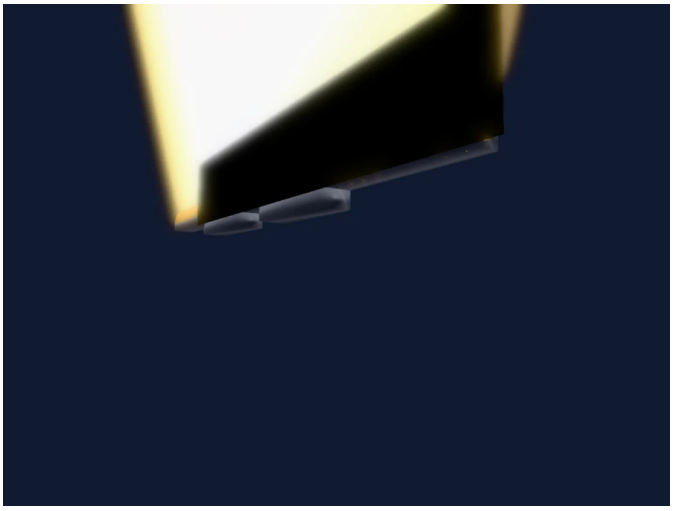

Manufacturer	**BeamZ**
Type	**LED bar**
DMX modes	**5**
DMX footprint	**4, 6, 9, 52 channels**
Beam angle	**25°**
Size (W × H × D)	**1004 × 30 × 55 mm**
GDTF fixture type	**6226C8DB-48DC-43A8-A317-57…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Dimmer

DMX modes

4 Channel Mode	4 ch
48CH Mode	4 ch
6 Channel Mode	6 ch
9 CH Mode	9 ch
52 CH Mode	52 ch

4 Channel Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

48CH Mode

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

6 Channel Mode

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 OFF 1–255 DIM
2	Strobe Frequency	0	0–9 OPEN 10–255 Strobe Rate (slow->Fasst)
3	Red	0	
4	Green	0	
5	Blue	0	
6	White	0	

9 CH Mode

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–0 OFF 1–255 DIM
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Strobe Frequency	0	0–9 No Function 10–255 Strobe Rate (Slow->Fast)
7	Color Macro1	0	
8	Color Mix MSpeed	0	
9	Color Effects1	0	

52 CH Mode

52 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

52 CH Mode (continued)

Ch	Function	Default	DMX values
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Reserved 29	0	
30	Reserved 30	0	
31	Reserved 31	0	
32	Reserved 32	0	
33	Reserved 33	0	
34	Reserved 34	0	
35	Reserved 35	0	
36	Reserved 36	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Strobe Frequency	0	

52 CH Mode (continued)

Ch	Function	Default	DMX values
50	Color Effects1	0	
51	Color Mix MSpeed	0	
52	Color Control	0	