
BeamZ

LCB300 LED BAR

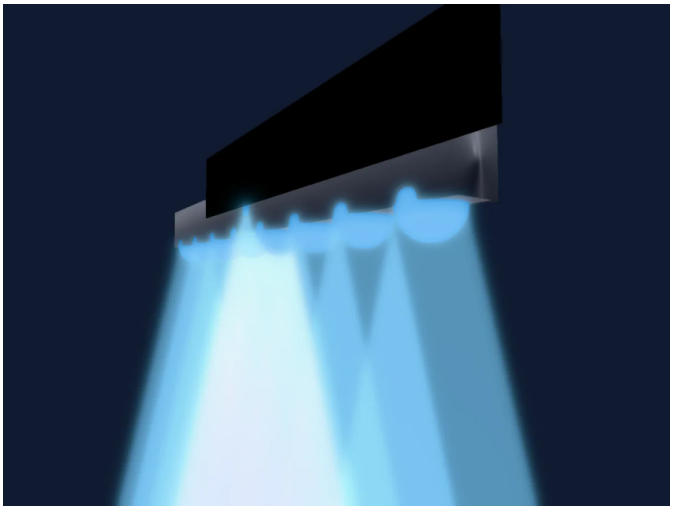

Manufacturer	**BeamZ**
Type	**LED bar**
DMX modes	**5**
DMX footprint	**4, 6, 9, 48, 52 channels**
Beam angle	**25°**
Heads / cells	**12**
Size (W × H × D)	**1000 × 100 × 80 mm**
GDTF fixture type	**E5F02B47-7C14-4141-BC77-2D…**

Controls

Extra LED colours · RGB colour mixing · Colour wheel · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

4 Channels	4 ch
6 Channels	6 ch
9 Channels	9 ch
48 Channels	48 ch
52 Channels	52 ch

4 Channels

4 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	

6 Channels

6 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Shutter / Strobe	0	0–9 No Function 10–255 Slow/fast
3	Red	0	
4	Green	0	
5	Blue	0	
6	White	0	

9 Channels

9 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Red	0	
3	Green	0	
4	Blue	0	
5	White	0	
6	Shutter / Strobe	0	0–9 No Function 10–255 Slow/fast
7	Color Macro1	0	
8	Effect Speed	0	
9	Effect	0	

48 Channels

48 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Red	0	
6	Green	0	
7	Blue	0	
8	White	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	White	0	
13	Red	0	

48 Channels (continued)

Ch	Function	Default	DMX values
14	Green	0	
15	Blue	0	
16	White	0	
17	Red	0	
18	Green	0	
19	Blue	0	
20	White	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	White	0	
25	Red	0	
26	Green	0	
27	Blue	0	
28	White	0	
29	Red	0	
30	Green	0	
31	Blue	0	
32	White	0	
33	Red	0	
34	Green	0	
35	Blue	0	
36	White	0	
37	Red	0	
38	Green	0	
39	Blue	0	
40	White	0	
41	Red	0	
42	Green	0	
43	Blue	0	
44	White	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	White	0	

52 Channels

52 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	White	0	
5	Red	0	
6	Green	0	

52 Channels (continued)

Ch	Function	Default	DMX values
7	Blue	0	
8	White	0	
9	Red	0	
10	Green	0	
11	Blue	0	
12	White	0	
13	Red	0	
14	Green	0	
15	Blue	0	
16	White	0	
17	Red	0	
18	Green	0	
19	Blue	0	
20	White	0	
21	Red	0	
22	Green	0	
23	Blue	0	
24	White	0	
25	Red	0	
26	Green	0	
27	Blue	0	
28	White	0	
29	Red	0	
30	Green	0	
31	Blue	0	
32	White	0	
33	Red	0	
34	Green	0	
35	Blue	0	
36	White	0	
37	Red	0	
38	Green	0	
39	Blue	0	
40	White	0	
41	Red	0	
42	Green	0	
43	Blue	0	
44	White	0	
45	Red	0	
46	Green	0	
47	Blue	0	
48	White	0	
49	Shutter / Strobe	0	0–9 No Function 10–255 Slow/fast
50	Color Macro1	0	

52 Channels (continued)

Ch	Function	Default	DMX values
51	Effect Speed	0	
52	Effect	0	