
BeamZ Pro

BWA 410 Mk2 IP65

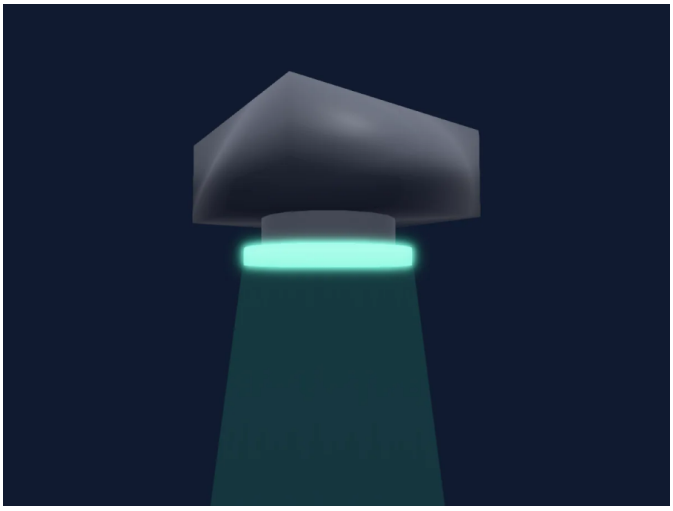

Manufacturer	**BeamZ Pro**
Type	**Effect light**
DMX modes	**2**
DMX footprint	**4, 8 channels**
Beam angle	**18°**
Size (W × H × D)	**250 × 100 × 250 mm**
GDTF fixture type	**90804F80-A9A3-475C-BBB1-6A…**

Controls

Extra LED colours · RGB colour mixing · Effect speed · Strobe · Dimmer

Safety-relevant functions

Built-in effect programmes

DMX modes

4 Ch	4 ch
8 Ch	8 ch

4 Ch

4 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	White	0	

8 Ch

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Red	255	
3	Green	255	
4	Blue	255	
5	White	0	
6	Shutter / Strobe	9	0–9 Open 10–71 Shutter1Strobe 2 · 001 1–4.49 Hz 72–132 Shutter1Strobe 2 · 025 4.54–7.97 Hz 133–195 Shutter1Strobe 2 · 050 8.03–11.6 Hz 196–254 Shutter1Strobe 2 · 075 11.6–14.9 Hz 255–255 Shutter1Strobe 2 · 100 15 Hz
7	Effect	0	0–9 Channel 2-5 effective 10–49 Colour Selection (Channel 8 for select the colour) 50–89 Colour jump (channel 8 for the speed) 90–129 Colour fade (channel 8 for the speed) 130–199 Colour mutation (channel 8 for the speed) 200–255 No Functiob
8	Effect Speed	0	