
BeamZ

SB400IP

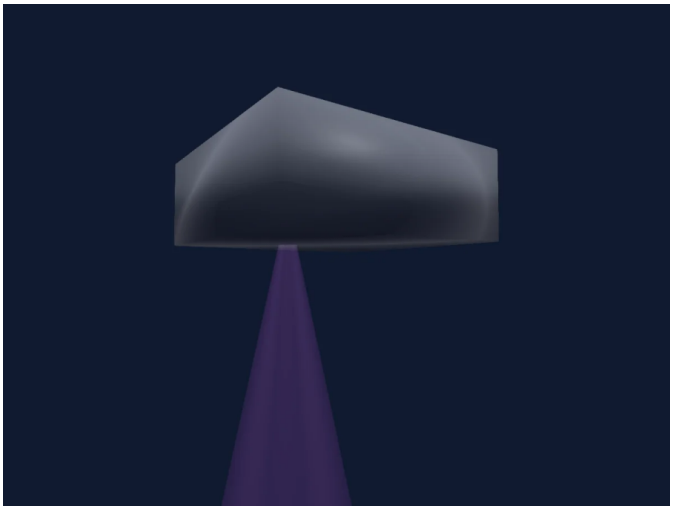

Manufacturer	**BeamZ**
Type	**Blinder**
DMX modes	**2**
DMX footprint	**4, 8 channels**
Beam angle	**25°**
Size (W × H × D)	**400 × 150 × 400 mm**
GDTF fixture type	**3BE4E48B-E7A3-41E6-A98C-EB…**

Controls

Effect speed · Dimmer

DMX modes

4 channel mode	4 ch
8 channel mode	8 ch

4 channel mode

4 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	

8 channel mode

8 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer	0	
3	Dimmer	0	
4	Dimmer	0	
5	Dimmer	0	
6	Strobe Frequency	0	
7	Shaper Macros	0	0–50 no function 51–100 jump mode from slow to fast 101–150 fade mode from slow to fast 151–200 pulse mode from slow to fast 201–225 sound active mode flash randomly 226–255 sound active mode flash all 4 led
8	Effect Speed	0	