
BETOPPER

LF350

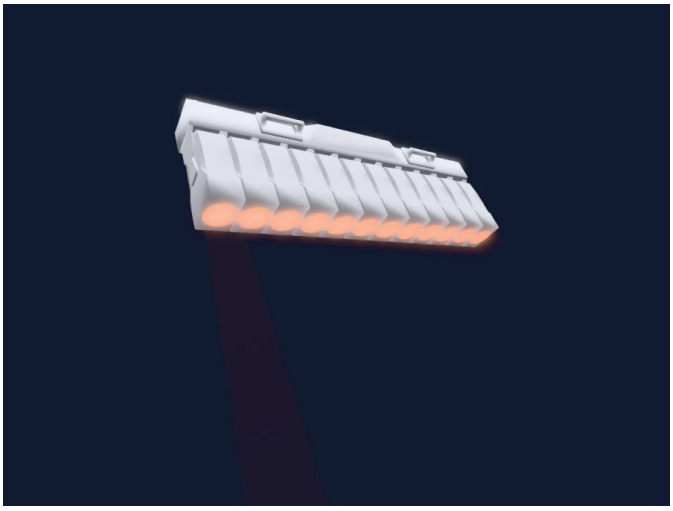

Manufacturer	**BETOPPER**
Type	**Profile spot**
DMX modes	**1**
DMX footprint	**38 channels**
Beam angle	**6°**
Tilt range	**200°**
Heads / cells	**8**
Size (W × H × D)	**993 × 244 × 179 mm**
GDTF fixture type	**5BFF01E4-BD6F-461C-B072-2E…**

Controls

Strobe · Dimmer · Pixel control · Movement speed

Safety-relevant functions

Fixture reset · Strobe

DMX modes

FL350 - 38Ch — 38 ch

FL350 - 38Ch

38 channels

Ch	Function	Default	DMX values
1	Tilt	127	0–126 Min 127–254 Home 255–255 Max
2	Tilt Fine	255	Fine byte of Tilt
3	Position MSpeed	0	0–0 Min 1–254 Min > Max 255–255 Max
4	Dimmer	0	
5	Shutter / Strobe	0	0–5 Off 6–255 Strobe
6	Dummy	0	
7	Dummy	0	
8	Dummy	0	
9	Dummy	0	
10	Shaper Macros	0	0–1 Off 2–218 White Macro Function 219–252 Comprehensive White Macro Function 253–255 Automatic switching White Macro Function
11	Shaper Macros Speed	0	
12	Position Effect	0	
13	Dimmer	0	0–0 Min 1–254 Min > Max 255–255 Max
14	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
15	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
16	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
17	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
18	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
19	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
20	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
21	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
22	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
23	Red	0	0–0 Min 1–254 Min > Max 255–255 Max

FL350 - 38Ch (continued)

Ch	Function	Default	DMX values
24	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
25	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
26	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
27	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
28	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
29	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
30	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
31	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
32	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
33	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
34	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
35	Red	0	0–0 Min 1–254 Min > Max 255–255 Max
36	Green	0	0–0 Min 1–254 Min > Max 255–255 Max
37	Blue	0	0–0 Min 1–254 Min > Max 255–255 Max
38	Control1	0	0–249 Off 250–255 Reset