
Bright

XBOY TW

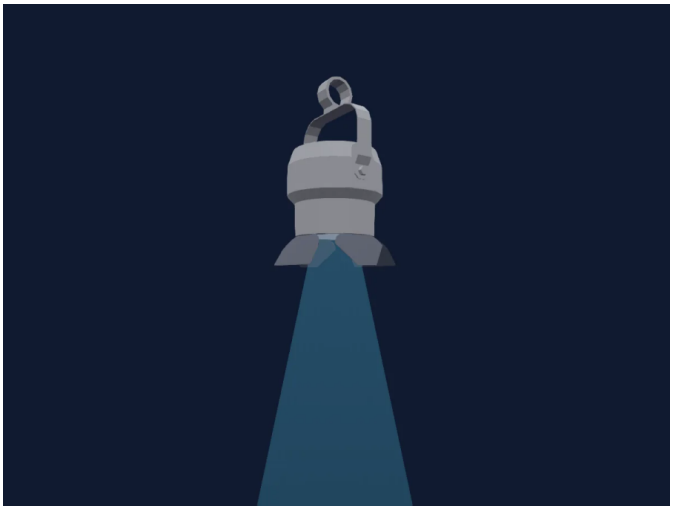

Manufacturer	**Bright**
Type	**PAR**
DMX modes	**4**
DMX footprint	**1, 2, 3, 5 channels**
Beam angle	**25°**
Size (W × H × D)	**180 × 208 × 62 mm**
GDTF fixture type	**20640DC8-CD00-4BC0-90AF-B…**

Controls

Extra LED colours · Colour temperature · Strobe · Dimmer

DMX modes

1 channel	1 ch
2 channel	2 ch
3 channel	3 ch
5 channel	5 ch

1 channel

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

2 channel

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	C TC	0	0–9 Auto colour temperature 10–254 Min ColorTemperature 255–255 Max ColorTemperature

3 channel

3 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add CW	255	
3	Dimmer	0	0–254 Closed 255–255 Open

5 channel

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open
2	Dimmer Fine	0	Fine byte of Dimmer
3	C TC	0	0–254 Min ColorTemperature 255–255 Max ColorTemperature
4	Shutter / Strobe	12	0–7 Closed 8–15 Open 16–118 Min Strobe 119–119 Max Strobe 120–127 Open (2) 128–182 StrobeRandom · Min Rnd 0.1–9.82 Hz 183–183 StrobeRandom · Max Rnd 10 Hz 184–190 Open (3) 192–246 Min Audio 247–247 Max Audio 248–255 Open (4)
5	Dimmer Curve	0	0–31 Instant 32–63 Short rise time 64–95 Medium rise time 96–127 Long rise time 128–158 Extra long rise time 159–255 NoFeature