
Brighter

FW 300plus

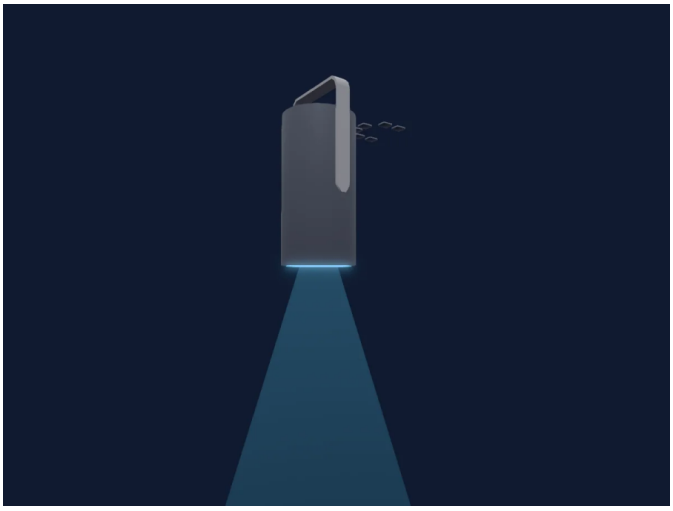

Manufacturer	**Brighter**
Type	**PAR**
DMX modes	**3**
DMX footprint	**1, 7, 13 channels**
Beam angle	**15-55°**
Size (W × H × D)	**220 × 290 × 40 mm**
GDTF fixture type	**10E2E1E6-B899-4F48-AD89-B4…**

Controls

Zoom · Extra LED colours · RGB colour mixing · Colour temperature · Colour wheel · Strobe · Dimmer

Safety-relevant functions

Strobe

DMX modes

1Ch	1 ch
7Ch	7 ch
13Ch	13 ch

1Ch

1 channel

Ch	Function	Default	DMX values
1	Dimmer	0	0–254 Closed 255–255 Open

7Ch

7 channels

Ch	Function	Default	DMX values
1	Red	0	
2	Green	0	
3	Blue	0	
4	Color Add C	0	
5	Color Add GY	0	
6	Color Add RY	0	
7	Zoom	128	0–127 Zoom Wide 128–254 Zoom Med 255–255 Zoom Narrow

13Ch

13 channels

Ch	Function	Default	DMX values
1	Red	255	
2	Green	255	
3	Blue	255	
4	Color Add C	255	
5	Color Add GY	255	
6	Color Add RY	255	
7	Dimmer	0	0–254 Closed 255–255 Open
8	Shutter / Strobe	0	0–0 Open 1–255 Strobe S>F
9	Zoom	128	0–127 Zoom Wide 128–254 Zoom Med 255–255 Zoom Narrow
10	C TO	0	
11	Tint	128	0–127 Magenta Shift 128–128 Off 129–255 Green Shift
12	Dimmer Mode	0	
13	Color Macro1	0	