
Briteq

BTX-Skyran

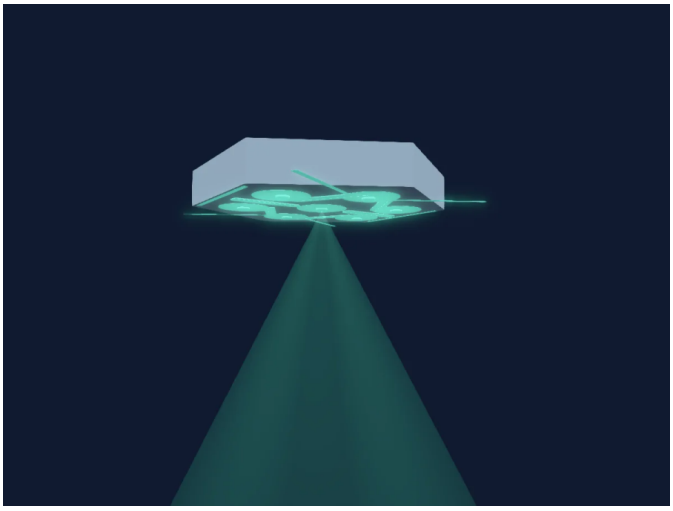

Manufacturer	**Briteq**
Type	**Blinder**
DMX modes	**8**
DMX footprint	**2, 14, 21, 33, 36, 58, 136, 156 channels**
Beam angle	**32.999477-78.040733°**
Heads / cells	**8**
Size (W × H × D)	**630 × 85 × 546 mm**
GDTF fixture type	**13987681-A18F-48B0-B89B-0C…**

Controls

Extra LED colours · Colour wheel · Effect speed · Strobe · Dimmer · Pixel control

Safety-relevant functions

Strobe · Built-in effect programmes

DMX modes

Raw Pixel 8b	2 ch
Compact	14 ch
Blinder1 16b	21 ch
Reduced 8b	33 ch
Reduced 16b	36 ch
Blinder7 16b	58 ch
Standard 8b	136 ch
Standard 16b	156 ch

Raw Pixel 8b

2 channels

Ch	Function	Default	DMX values
1	Color Add WW	0	
2	Color Add RY	0	

Compact

14 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add RY	0	
3	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
4	Dimmer	0	0–254 Closed 255–255 Open
5	Strobe Duration	0	
6	Strobe Rate	0	0–6 No strobe 7–7 Min 8–254 Strobe <> 255–255 Max
7	Shutter / Strobe 2	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels
8	Control1	0	0–5 Redshift active 6–10 Redshift disabled 11–15 NoFeature 1 16–116 Dim speed 117–120 NoFeature 2 121–125 Curve: Linear 126–130 Curve: Square 131–135 Curve: S-curve 136–140 NoFeature 3 141–145 PWM: 1200Hz 146–150 PWM: 2400HZ 151–155 PWM: 3600Hz 156–160 PWM: 4800Hz 161–165 NoFeature 4 166–170 Pixel order A 171–175 Pixel order B 176–180 Pixel order C 181–185 Pixel order D 186–189 Pixel order E 190–195 Pixel order F 196–200 NoFeature 5 201–205 Fan mode: Silent 206–210 Fan mode: Auto 211–215 Fan mode: Full 216–220 NoFeature 6 221–225 Load factory settings 226–255 No Function
9	Red	255	
10	Green	255	
11	Blue	255	

Compact (continued)

Ch	Function	Default	DMX values
12	Dimmer	0	0–254 Closed 255–255 Open
13	Dimmer	0	0–254 Closed 255–255 Open
14	Dimmer	0	0–254 Closed 255–255 Open

Blinder1 16b

21 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add WW Fine	255	Fine byte of Color Add WW
3	Color Add RY	0	
4	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
5	Color Add WW	0	
6	Color Add RY	0	
7	Effect	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
8	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
9	Effects1Adjust1	0	
10	Effects1Fade	0	
11	Dimmer	0	0–254 Closed 255–255 Open
12	Dimmer Fine	0	Fine byte of Dimmer
13	Strobe Duration	0	
14	Strobe Rate	0	0–6 No strobe 7–7 Min 8–254 Strobe <> 255–255 Max

Blinder1 16b (continued)

Ch	Function	Default	DMX values
15	Shutter / Strobe	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels
16	Effect 2	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
17	Effect Speed 2	0	0–0 Index 1–254 Rate <> 255–255 Max
18	Effects2Adjust1	0	
19	Effects2Fade	0	
20	Control1	0	0–5 Redshift active 6–10 Redshift disabled 11–15 NoFeature 1 16–116 Dim speed 117–120 NoFeature 2 121–125 Curve: Linear 126–130 Curve: Square 131–135 Curve: S-curve 136–140 NoFeature 3 141–145 PWM: 1200Hz 146–150 PWM: 2400HZ 151–155 PWM: 3600Hz 156–160 PWM: 4800Hz 161–165 NoFeature 4 166–170 Pixel order A 171–175 Pixel order B 176–180 Pixel order C 181–185 Pixel order D 186–189 Pixel order E 190–195 Pixel order F 196–200 NoFeature 5 201–205 Fan mode: Silent 206–210 Fan mode: Auto 211–215 Fan mode: Full 216–220 NoFeature 6 221–225 Load factory settings 226–255 No Function

Blinder1 16b (continued)

Ch	Function	Default	DMX values
21	Color Control	0	0–15 DMX control 16–238 Mixed control 239–255 Media control

Reduced 8b

33 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add RY	0	
3	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
4	Effect	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
5	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
6	Dimmer	0	0–254 Closed 255–255 Open
7	Strobe Duration	0	
8	Strobe Rate	0	0–6 No strobe 7–7 Min 8–254 Strobe <> 255–255 Max
9	Shutter / Strobe 2	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels

Reduced 8b (continued)

Ch	Function	Default	DMX values
10	Effect	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
11	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
12	Control1	0	0–5 Redshift active 6–10 Redshift disabled 11–15 NoFeature 1 16–116 Dim speed 117–120 NoFeature 2 121–125 Curve: Linear 126–130 Curve: Square 131–135 Curve: S-curve 136–140 NoFeature 3 141–145 PWM: 1200Hz 146–150 PWM: 2400HZ 151–155 PWM: 3600Hz 156–160 PWM: 4800Hz 161–165 NoFeature 4 166–170 Pixel order A 171–175 Pixel order B 176–180 Pixel order C 181–185 Pixel order D 186–189 Pixel order E 190–195 Pixel order F 196–200 NoFeature 5 201–205 Fan mode: Silent 206–210 Fan mode: Auto 211–215 Fan mode: Full 216–220 NoFeature 6 221–225 Load factory settings 226–255 No Function
13	Dimmer	0	0–254 Closed 255–255 Open
14	Red	255	
15	Green	255	
16	Blue	255	

Reduced 8b (continued)

Ch	Function	Default	DMX values
17	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
18	Effect 2	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
19	Effect Speed 2	0	0–0 Index 1–254 Rate <> 255–255 Max
20	Dimmer	0	0–254 Closed 255–255 Open
21	Red	255	
22	Green	255	
23	Blue	255	
24	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
25	Effect 3	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)

Reduced 8b (continued)

Ch	Function	Default	DMX values
26	Effect Speed 3	0	0–0 Index 1–254 Rate <> 255–255 Max
27	Dimmer	0	0–254 Closed 255–255 Open
28	Red	255	
29	Green	255	
30	Blue	255	
31	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
32	Effect 4	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
33	Effect Speed 4	0	0–0 Index 1–254 Rate <> 255–255 Max

Reduced 16b

36 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add WW Fine	255	Fine byte of Color Add WW
3	Color Add RY	0	
4	Color Add RY Fine	0	Fine byte of Color Add RY
5	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open

Reduced 16b (continued)

Ch	Function	Default	DMX values
6	Effect	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
7	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
8	Dimmer	0	0–254 Closed 255–255 Open
9	Dimmer Fine	0	Fine byte of Dimmer
10	Strobe Duration	0	
11	Strobe Rate	0	0–6 No strobe 7–7 Min 8–254 Strobe <> 255–255 Max
12	Shutter / Strobe 2	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels
13	Effect	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)

Reduced 16b (continued)

Ch	Function	Default	DMX values
14	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
15	Control1	0	0–5 Redshift active 6–10 Redshift disabled 11–15 NoFeature 1 16–116 Dim speed 117–120 NoFeature 2 121–125 Curve: Linear 126–130 Curve: Square 131–135 Curve: S-curve 136–140 NoFeature 3 141–145 PWM: 1200Hz 146–150 PWM: 2400HZ 151–155 PWM: 3600Hz 156–160 PWM: 4800Hz 161–165 NoFeature 4 166–170 Pixel order A 171–175 Pixel order B 176–180 Pixel order C 181–185 Pixel order D 186–189 Pixel order E 190–195 Pixel order F 196–200 NoFeature 5 201–205 Fan mode: Silent 206–210 Fan mode: Auto 211–215 Fan mode: Full 216–220 NoFeature 6 221–225 Load factory settings 226–255 No Function
16	Dimmer	0	0–254 Closed 255–255 Open
17	Red	255	
18	Green	255	
19	Blue	255	
20	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open

Reduced 16b (continued)

Ch	Function	Default	DMX values
21	Effect 2	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
22	Effect Speed 2	0	0–0 Index 1–254 Rate <> 255–255 Max
23	Dimmer	0	0–254 Closed 255–255 Open
24	Red	255	
25	Green	255	
26	Blue	255	
27	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
28	Effect 3	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
29	Effect Speed 3	0	0–0 Index 1–254 Rate <> 255–255 Max

Reduced 16b (continued)

Ch	Function	Default	DMX values
30	Dimmer	0	0–254 Closed 255–255 Open
31	Red	255	
32	Green	255	
33	Blue	255	
34	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
35	Effect 4	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
36	Effect Speed 4	0	0–0 Index 1–254 Rate <> 255–255 Max

Blinder7 16b

58 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add WW Fine	255	Fine byte of Color Add WW
3	Color Add RY	0	
4	Color Add RY Fine	0	Fine byte of Color Add RY
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	

Blinder7 16b (continued)

Ch	Function	Default	DMX values
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
30	Color Add WW	0	
31	Color Add RY	0	
32	Effect	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
33	Effect Speed	0	0–0 Index 1–254 Rate <> 255–255 Max
34	Effects1Adjust1	0	
35	Effects1Fade	0	
36	Dimmer	0	0–254 Closed 255–255 Open
37	Dimmer Fine	0	Fine byte of Dimmer
38	Dimmer	255	
39	Dimmer Fine	255	Fine byte of Dimmer
40	Reserved 40	0	
41	Reserved 41	0	

Blinder7 16b (continued)

Ch	Function	Default	DMX values
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Strobe Duration	0	
51	Strobe Rate	0	0–6 No strobe 7–7 Min 8–254 Strobe <> 255–255 Max
52	Shutter / Strobe	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels
53	Effect 2	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
54	Effect Speed 2	0	0–0 Index 1–254 Rate <> 255–255 Max
55	Effects2Adjust1	0	
56	Effects2Fade	0	

Blinder7 16b (continued)

Ch	Function	Default	DMX values
57	Control1	0	0–5 Redshift active 6–10 Redshift disabled 11–15 NoFeature 1 16–116 Dim speed 117–120 NoFeature 2 121–125 Curve: Linear 126–130 Curve: Square 131–135 Curve: S-curve 136–140 NoFeature 3 141–145 PWM: 1200Hz 146–150 PWM: 2400HZ 151–155 PWM: 3600Hz 156–160 PWM: 4800Hz 161–165 NoFeature 4 166–170 Pixel order A 171–175 Pixel order B 176–180 Pixel order C 181–185 Pixel order D 186–189 Pixel order E 190–195 Pixel order F 196–200 NoFeature 5 201–205 Fan mode: Silent 206–210 Fan mode: Auto 211–215 Fan mode: Full 216–220 NoFeature 6 221–225 Load factory settings 226–255 No Function
58	Color Control	0	0–15 DMX control 16–238 Mixed control 239–255 Media control

Standard 8b

136 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add RY	0	
3	Green	255	
4	Blue	255	
5	Reserved 5	0	
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
16	Color Add WW	255	
17	Color Add RY	0	

Standard 8b (continued)

Ch	Function	Default	DMX values
18	Effect 5	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
19	Effect Speed 5	0	
20	Effects5Adjust1	0	
21	Effects5Fade	0	
22	Dimmer	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Strobe Duration	0	
29	Strobe Rate	0	
30	Shutter / Strobe 2	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels

Standard 8b (continued)

Ch	Function	Default	DMX values
31	Effect	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
32	Effect Speed	0	
33	Effects1Adjust1	0	
34	Effects1Fade	0	
35	Control1	0	
36	Color Control	0	
37	Reserved 37	0	
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Reserved 48	0	
49	Reserved 49	0	
50	Reserved 50	0	
51	Reserved 51	0	
52	Reserved 52	0	
53	Reserved 53	0	
54	Reserved 54	0	
55	Reserved 55	0	
56	Reserved 56	0	
57	Reserved 57	0	
58	Reserved 58	0	
59	Reserved 59	0	
60	Reserved 60	0	
61	Reserved 61	0	

Standard 8b (continued)

Ch	Function	Default	DMX values
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Shutter / Strobe 3	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
66	Red	0	
67	Green	0	
68	Blue	0	
69	Effect 2	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
70	Effect Speed 2	0	
71	Effects2Adjust1	0	
72	Effects2Fade	0	
73	Reserved 73	0	
74	Reserved 74	0	
75	Reserved 75	0	
76	Reserved 76	0	
77	Reserved 77	0	
78	Reserved 78	0	
79	Reserved 79	0	
80	Reserved 80	0	
81	Reserved 81	0	
82	Reserved 82	0	
83	Reserved 83	0	
84	Reserved 84	0	
85	Reserved 85	0	
86	Reserved 86	0	
87	Reserved 87	0	
88	Reserved 88	0	
89	Reserved 89	0	

Standard 8b (continued)

Ch	Function	Default	DMX values
90	Reserved 90	0	
91	Reserved 91	0	
92	Reserved 92	0	
93	Reserved 93	0	
94	Reserved 94	0	
95	Reserved 95	0	
96	Reserved 96	0	
97	Shutter / Strobe 4	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
98	Red	0	
99	Green	0	
100	Blue	0	
101	Effect 3	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
102	Effect Speed 3	0	
103	Effects3Adjust1	0	
104	Effects3Fade	0	
105	Reserved 105	0	
106	Reserved 106	0	
107	Reserved 107	0	
108	Reserved 108	0	
109	Reserved 109	0	
110	Reserved 110	0	
111	Reserved 111	0	
112	Reserved 112	0	
113	Reserved 113	0	
114	Reserved 114	0	
115	Reserved 115	0	
116	Reserved 116	0	
117	Reserved 117	0	

Standard 8b (continued)

Ch	Function	Default	DMX values
118	Reserved 118	0	
119	Reserved 119	0	
120	Reserved 120	0	
121	Reserved 121	0	
122	Reserved 122	0	
123	Reserved 123	0	
124	Reserved 124	0	
125	Reserved 125	0	
126	Reserved 126	0	
127	Reserved 127	0	
128	Reserved 128	0	
129	Shutter / Strobe 5	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
130	Red	0	
131	Green	0	
132	Blue	0	
133	Effect 4	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
134	Effect Speed 4	0	
135	Effects4Adjust1	0	
136	Effects4Fade	0	

Standard 16b

156 channels

Ch	Function	Default	DMX values
1	Color Add WW	255	
2	Color Add WW Fine	255	Fine byte of Color Add WW
3	Color Add RY	0	
4	Color Add RY Fine	0	Fine byte of Color Add RY
5	Reserved 5	0	

Standard 16b (continued)

Ch	Function	Default	DMX values
6	Reserved 6	0	
7	Reserved 7	0	
8	Reserved 8	0	
9	Reserved 9	0	
10	Reserved 10	0	
11	Reserved 11	0	
12	Reserved 12	0	
13	Reserved 13	0	
14	Reserved 14	0	
15	Reserved 15	0	
16	Reserved 16	0	
17	Reserved 17	0	
18	Reserved 18	0	
19	Reserved 19	0	
20	Reserved 20	0	
21	Reserved 21	0	
22	Reserved 22	0	
23	Reserved 23	0	
24	Reserved 24	0	
25	Reserved 25	0	
26	Reserved 26	0	
27	Reserved 27	0	
28	Reserved 28	0	
29	Shutter / Strobe	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
30	Color Add WW	255	
31	Color Add RY	0	
32	Effect	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
33	Effect Speed	0	

Standard 16b (continued)

Ch	Function	Default	DMX values
34	Effects1Adjust1	0	
35	Effects1Fade	0	
36	Dimmer	0	
37	Dimmer Fine	0	Fine byte of Dimmer
38	Reserved 38	0	
39	Reserved 39	0	
40	Reserved 40	0	
41	Reserved 41	0	
42	Reserved 42	0	
43	Reserved 43	0	
44	Reserved 44	0	
45	Reserved 45	0	
46	Reserved 46	0	
47	Reserved 47	0	
48	Strobe Duration	0	
49	Strobe Rate	0	
50	Shutter / Strobe 2	0	0–5 Strobe 6–50 Ramp up 51–100 Ramp down 101–150 Ramp up-down 151–200 Lightning 201–230 Random - Combined pixels 231–255 Random - seperate pixels
51	Effect 2	0	0–40 No Effect (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
52	Effect Speed 2	0	
53	Effects2Adjust1	0	
54	Effects2Fade	0	
55	Control1	0	
56	Color Control	0	
57	Dimmer	0	
58	Red	255	
59	Green	255	
60	Blue	255	

Standard 16b (continued)

Ch	Function	Default	DMX values
61	Reserved 61	0	
62	Reserved 62	0	
63	Reserved 63	0	
64	Reserved 64	0	
65	Reserved 65	0	
66	Reserved 66	0	
67	Reserved 67	0	
68	Reserved 68	0	
69	Reserved 69	0	
70	Reserved 70	0	
71	Reserved 71	0	
72	Reserved 72	0	
73	Reserved 73	0	
74	Reserved 74	0	
75	Reserved 75	0	
76	Reserved 76	0	
77	Reserved 77	0	
78	Reserved 78	0	
79	Reserved 79	0	
80	Reserved 80	0	
81	Reserved 81	0	
82	Reserved 82	0	
83	Reserved 83	0	
84	Reserved 84	0	
85	Shutter / Strobe 3	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
86	Red	0	
87	Green	0	
88	Blue	0	

Standard 16b (continued)

Ch	Function	Default	DMX values
89	Effect 3	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
90	Effect Speed 3	0	
91	Effects3Adjust1	0	
92	Effects3Fade	0	
93	Dimmer	0	
94	Red	255	
95	Green	255	
96	Blue	255	
97	Reserved 97	0	
98	Reserved 98	0	
99	Reserved 99	0	
100	Reserved 100	0	
101	Reserved 101	0	
102	Reserved 102	0	
103	Reserved 103	0	
104	Reserved 104	0	
105	Reserved 105	0	
106	Reserved 106	0	
107	Reserved 107	0	
108	Reserved 108	0	
109	Reserved 109	0	
110	Reserved 110	0	
111	Reserved 111	0	
112	Reserved 112	0	
113	Reserved 113	0	
114	Reserved 114	0	
115	Reserved 115	0	
116	Reserved 116	0	

Standard 16b (continued)

Ch	Function	Default	DMX values
117	Shutter / Strobe 4	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
118	Red	0	
119	Green	0	
120	Blue	0	
121	Effect 4	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
122	Effect Speed 4	0	
123	Effects4Adjust1	0	
124	Effects4Fade	0	
125	Dimmer	0	
126	Red	255	
127	Green	255	
128	Blue	255	
129	Reserved 129	0	
130	Reserved 130	0	
131	Reserved 131	0	
132	Reserved 132	0	
133	Reserved 133	0	
134	Reserved 134	0	
135	Reserved 135	0	
136	Reserved 136	0	
137	Reserved 137	0	
138	Reserved 138	0	
139	Reserved 139	0	
140	Reserved 140	0	
141	Reserved 141	0	
142	Reserved 142	0	
143	Reserved 143	0	
144	Reserved 144	0	

Standard 16b (continued)

Ch	Function	Default	DMX values
145	Reserved 145	0	
146	Reserved 146	0	
147	Reserved 147	0	
148	Reserved 148	0	
149	Shutter / Strobe 5	0	0–1 Open 2–85 Rnd strobe - CoP 86–169 Rnd Strobe - SeP 170–253 Strobe 254–255 Open
150	Red	0	
151	Green	0	
152	Blue	0	
153	Effect 5	0	0–40 No effects (wheel slot 1) 41–50 Effect 1 (wheel slot 2) 51–60 Effect 2 (wheel slot 3) 61–70 Effect 3 (wheel slot 4) 71–80 Effect 4 (wheel slot 5) 81–90 Effect 5 (wheel slot 6) 91–100 Effect 6 (wheel slot 7) 101–110 Effect 7 (wheel slot 8) 111–120 Effect 8 (wheel slot 9) 121–130 Effect 9 (wheel slot 10) 131–140 Effect 10 (wheel slot 11) 141–150 Effect 1 (wheel slot 2) 151–160 Effect 2 (wheel slot 3) 161–170 Effect 3 (wheel slot 4) 171–180 Effect 4 (wheel slot 5) 181–190 Effect 5 (wheel slot 6) 191–200 Effect 6 (wheel slot 7) 201–210 Effect 7 (wheel slot 8) 211–220 Effect 8 (wheel slot 9) 221–230 Effect 9 (wheel slot 10) 231–255 Effect 10 (wheel slot 11)
154	Effect Speed 5	0	
155	Effects5Adjust1	0	
156	Effects5Fade	0	