
Cameo

Matrix Panel 3WW

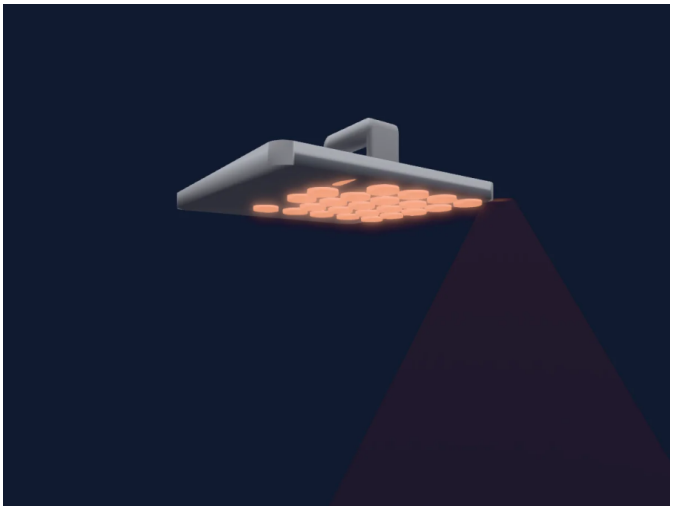

Manufacturer	**Cameo**
Type	**Effect light**
DMX modes	**4**
DMX footprint	**2, 5, 10, 28 channels**
Beam angle	**55°**
Size (W × H × D)	**580 × 67 × 580 mm**
GDTF fixture type	**BE144EA0-100B-46F1-86B7-13…**

Controls

Effect speed · Dimmer

DMX modes

2 ch	2 ch
5ch	5 ch
10 ch	10 ch
28ch	28 ch

2 ch

2 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Mode Strobe	0	

5ch

5 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Strobe Frequency	0	
3	Media Folder1	0	
4	Effect Speed	0	
5	Effects1Pos Rotate	0	

10 ch

10 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Strobe Frequency	0	
4	Media Folder1	0	
5	Media Content1	0	
6	Effect Speed	0	
7	Play Begin	0	
8	Play End	0	
9	Effects1Pos Rotate	0	
10	Invert	0	

28ch

28 channels

Ch	Function	Default	DMX values
1	Dimmer	0	
2	Dimmer Fine	0	Fine byte of Dimmer
3	Strobe Mode Strobe	0	
4	Dimmer	0	0–0 Closed 1–255 Open
5	Dimmer	0	0–0 Closed 1–255 Open
6	Dimmer	0	0–0 Closed 1–255 Open
7	Dimmer	0	0–0 Closed 1–255 Open
8	Dimmer	0	0–0 Closed 1–255 Open
9	Dimmer	0	0–0 Closed 1–255 Open
10	Dimmer	0	0–0 Closed 1–255 Open
11	Dimmer	0	0–0 Closed 1–255 Open

28ch (continued)

Ch	Function	Default	DMX values
12	Dimmer	0	0–0 Closed 1–255 Open
13	Dimmer	0	0–0 Closed 1–255 Open
14	Dimmer	0	0–0 Closed 1–255 Open
15	Dimmer	0	0–0 Closed 1–255 Open
16	Dimmer	0	0–0 Closed 1–255 Open
17	Dimmer	0	0–0 Closed 1–255 Open
18	Dimmer	0	0–0 Closed 1–255 Open
19	Dimmer	0	0–0 Closed 1–255 Open
20	Dimmer	0	0–0 Closed 1–255 Open
21	Dimmer	0	0–0 Closed 1–255 Open
22	Dimmer	0	0–0 Closed 1–255 Open
23	Dimmer	0	0–0 Closed 1–255 Open
24	Dimmer	0	0–0 Closed 1–255 Open
25	Dimmer	0	0–0 Closed 1–255 Open
26	Dimmer	0	0–0 Closed 1–255 Open
27	Dimmer	0	0–0 Closed 1–255 Open
28	Dimmer	0	0–0 Closed 1–255 Open